

ODESSA 24 (OD-21113)



Product description

Large - Supplied with specific 8 m cylindrical, tapered galvanised steel pole: SPT180176-OD - RGBW




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- RGBW available upon request

Optic

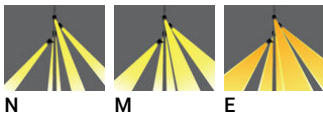

Product colour



Special finishes upon request




ODESSA 24 (OD-21113)

Technical information

Material	Aluminium
Light source	4x7 LED
Power	180 W
Lumen	5480 - 6676 lm
Efficacy	30 - 37 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	N, M, E
Optic value	20°, 34°, 24° x 49°
CCT / CRI	RGBW30, RGBW40
Dimming type	DMX, DMX/RDM
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	122.5 kg

Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 5x1.5 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Variants (DMX, DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

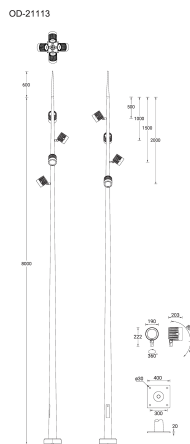

ODESSA 24 (OD-21113)**Accessory**

Anti glare visor
A54431



Anti glare louvre
A54631



Linear spread lens
A51814



Honeycomb louvre
A54121



Root mount kit
A20491



Remote box IP65
A80191



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)

4 m - Cylindrical, tapered
galvanised steel pole for
ODESSA
SPT140118-OD