

**PATCHI 1 (PAT-30001) (Version 1)****Product description**

Without remote driver - Constant voltage (CV) 24 V -  
RGBW dynamic programming - 16  
addresses/channels - 43.4x57.8 mm - 500 mm

**Luminaire Structure**

- Aluminium anodised housing
- Spring snap-on mounting bracket, easy installing and aiming
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA curved diffuser
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- $\geq 90^\circ$  viewing angle
- 24 VDC input, DMX512 address with stable signal

**Optic**

EW


**Product colour**05 - Matt Silver  
(RAL 9006)

**PATCHI 1 (PAT-30001) (Version 1)**

**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant voltage (CV)	<b>Product colours</b>	Matt Silver
<b>Light source</b>	24 LED	<b>Input voltage</b>	24 VDC	<b>Weight</b>	0.4 kg
<b>Power</b>	6 W	<b>Optic</b>	EW	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	21 lm	<b>Optic value</b>	90°	<b>Through wiring</b>	Two cable entries for through wiring
<b>Efficacy</b>	4 lm/W	<b>CCT / CRI</b>	RGBW40	<b>Lens / Reflector / Optic</b>	Opal PMMA curved diffuser
<b>Driver option</b>	Remote driver (not included)	<b>Dimming type</b>	DMX		

**PAT-30001**

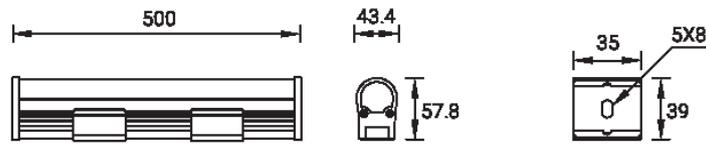

**PATCHI 1 (PAT-30001) (Version 1)****Accessory**

DMX Control System  
**Control-DMX**



Driver (CV) - On/Off - 36 W - IP67  
- 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**