

PITTSFIELD 4 (PIT-90102)



Product description

Down (Optic) & Up (Optic 2nd) - 720 mm



microPrim™


Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Integral control gear
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

PITTSFIELD 4 (PIT-90102)


Technical information

Material	Aluminium
Light source	288 & 168 LED
Power	47 W
Lumen	4958 - 6922 lm
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	O, P

Optic value	107°, 93°
Optic (2nd)	0
Optic (2nd) value	105°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U5-G1
ULR	31%, 33%
ULOR	31%, 33%
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.7 kg
Operating temperature	-20 °C to 40 °C
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 23,000
Lifetime L80B10 (hours)	> 45,000
Lifetime L80B50 (hours)	> 50,000
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PIT-90102

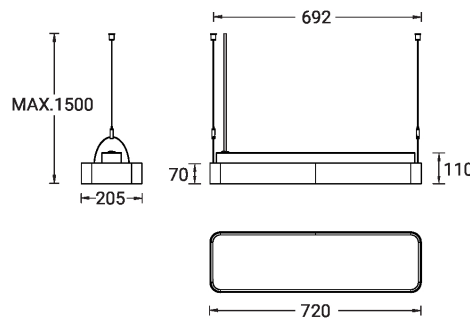


PITTSFIELD 4 (PIT-90102)**Accessory**


Supply cable surface mounting
box
A80981



Decorative pattern - Type A for
PITTSFIELD 720 mm
A91921



Decorative pattern - Type B for
PITTSFIELD 720 mm
A93321

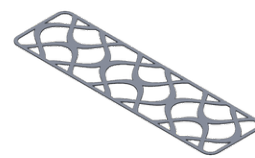

Decorative pattern - Type C for
PITTSFIELD 720 mm
A94721



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI