

SANDY 9 (SA-31553)



Product description

Large - Tunable White




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



G

Product colour



Special finishes upon request



SANDY 9 (SA-31553)


Technical information

Material	Aluminium
Light source	192 LED
Power	28 W
Lumen	1181 lm
Efficacy	42 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	109°x119°
CCT / CRI	TW (2700K - 6500K)
Bug	B0-U3-G2
ULR	35
ULOR	35
CIE flux code n°3	74
Dimming type	DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.3 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

SA-31553

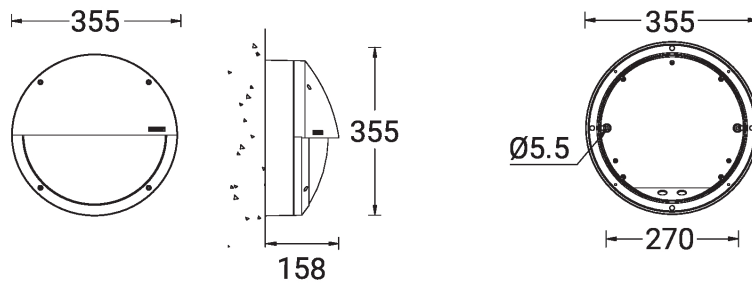

SANDY 9 (SA-31553)**Accessory**



Surface mounting box for easy
cabling (SANDY 9)
SCE-SANDY-9
