

STARTECH 2 (ST-70187)



Product description

193x193 mm - 514 mm



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

Optic




G

Product colour

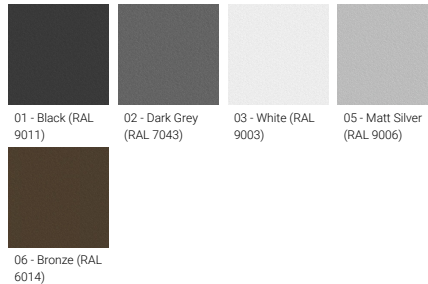

Special finishes upon request

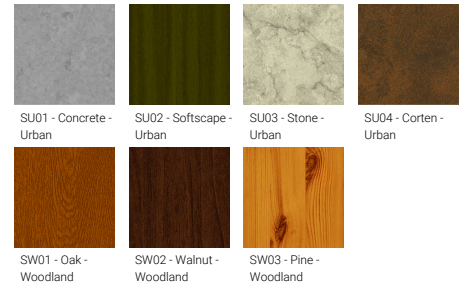


STARTECH 2 (ST-70187)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	360°	Weight	6.9 kg
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Lumen	1018 - 1030 lm	Bug	B1-U3-G1	Lens / Reflector / Optic	Opal toughened glass diffuser
Efficacy	25 lm/W	ULR	46%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	ULOR	46%	Lifetime L90B10 (hours)	> 55,000
Driver	Constant current (CC)	CIE flux code n°3	66	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI		

ST-70187



STARTECH 2 (ST-70187)

Accessory



Anchor bolt
A10391