

ARIZONA 4 (AR-21041)



Product description

Top Ø160 mm - IK07



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear acrylic PMMA diffuser
- Integral control gear

Optic




G

Product colour

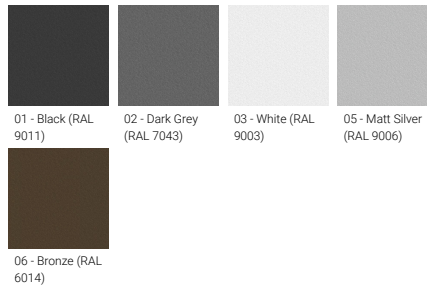

Special finishes upon request

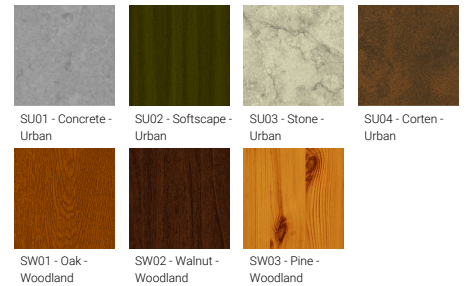

ARIZONA 4 (AR-21041)


Technical information

Material	Aluminium
Light source	1 COB
Power	28 W
Lumen	1639 - 1826 lm
Efficacy	59 - 65 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	360°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B1-U3-G0
ULR	4%
ULOR	4%
CIE flux code n°3	99
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	5.6 kg

Operating temperature	-20 °C to 40 °C
EPA (m2)	0.122
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 61,000
Variants (On/Off, 1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AR-21041

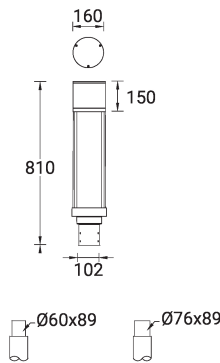

ARIZONA 4 (AR-21041)

Accessory



DALI Control System
Control-DALI
