


CAPSULE 1 (CA-30305-1MS)



Product description

With integrated motion sensor




microPrim™



Luminaire Structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear

Optic




G

Product colour

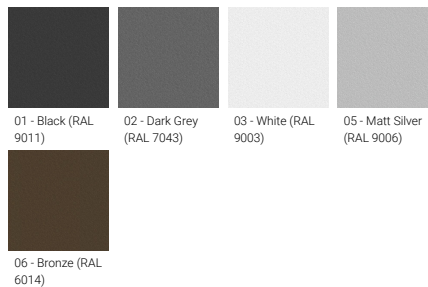

Special finishes upon request

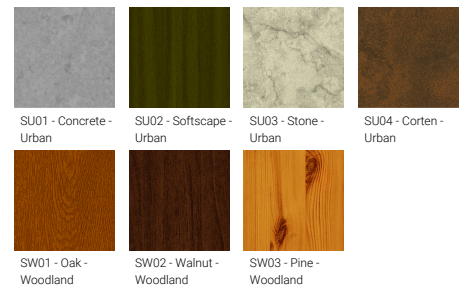

CAPSULE 1 (CA-30305-1MS)



Technical information

Material	Aluminium
Light source	96 LED
Power	15 W
Lumen	1247 - 1313 lm
Efficacy	83 - 88 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	99°x165°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U3-G1
ULR	15%
ULOR	15%
CIE flux code n°3	85
Dimming type	On/Off, 1-10V
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.5 kg

Operating temperature	-20 °C to 50 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 37,000
Lifetime L80B10 (hours)	> 78,000
Lifetime L80B50 (hours)	> 86,000
Variants (On/Off, 1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO)

CA-30305-1MS



CAPSULE

Adjustable sensor (10 seconds – 15 minutes)
150° Sensitivity
Sensor detection area:
CA-3032S-1MS (2.7 – 6.8 m)
CA-3032S-1MS (3.0 – 7.0 m)
CA-3039S-1MS (3.0 – 6.5 m)
CA-3040S-1MS (3.6 – 8.0 m)

- Motion sensor - Microwave - On/Off
- Adjustable sensor (5 seconds - 30 minutes)
- 120° Sensitivity
- Sensor detection area:
 - CA-3232S-1MS (2.3 - 5.5 m)
 - CA-3032S-1MS (2.6 - 7.9 m)
 - CA-3259S-1MS (1.4 - 5.5 m)
 - CA-3060S-1MS (1.3 - 2.4 m)

CAPSULE 1 (CA-30305-1MS)**Accessory**



DALI Control System
Control-DALI



Remote controller for the motion
sensor - 1-10V (A34191)
A34391