

**PRAGUE 3 (PRA-10022-1MS)**



**Product description**

260x75 mm - 1000 mm - With integrated motion sensor - 1 side



microPrim™




**DARKSKY APPROVED**  
Reduces light pollution  
Certified by DarkSky.org




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


**Optic**

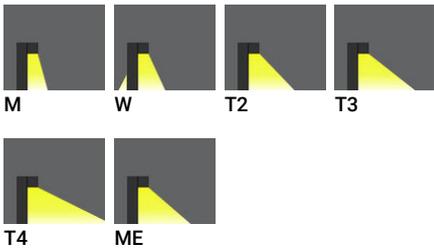

**Product colour**

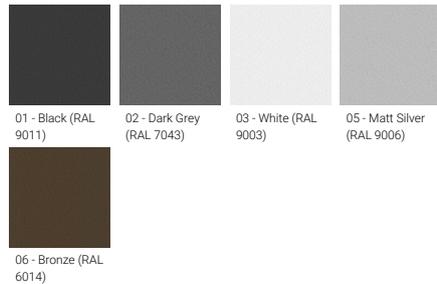

**Special finishes upon request**

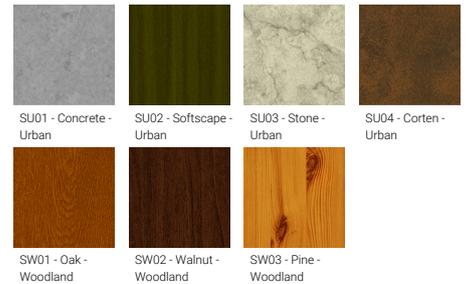

**PRAGUE 3 (PRA-10022-1MS)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	12 LED
<b>Power</b>	20 W
<b>Lumen</b>	1938 - 2391 lm
<b>Efficacy</b>	102 - 126 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	M, W, EW, T2, T3, T4, ME


<b>Optic value</b>	30°x20°, 54°x33°, 104°x66°, 139°x56°, 126°x65°, 103°x68°, 137x57°
<b>CCT / CRI</b>	2700K CRI80, 3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U2-G1, B0-U3-G1, B1-U3-G1
<b>ULR</b>	2%, 3%, 7%, 8%, 9%
<b>ULOR</b>	2%, 3%, 7%, 8%, 9%
<b>CIE flux code n°3</b>	95, 97
<b>Dimming type</b>	1-10V
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	10.4 kg

<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000

**PRAGUE**  
Adjustable sensor (5 seconds - 30 minutes)  
30° - 150° Sensitivity  
Sensor detection area: 9 m

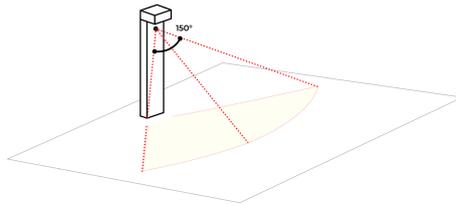

**PRA-10022-1MS**

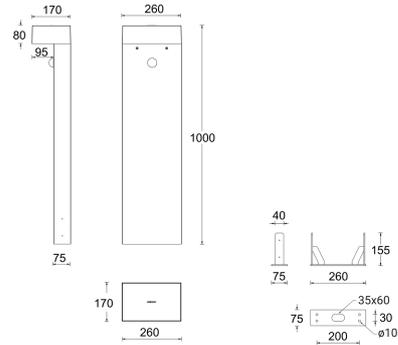

**PRAGUE 3** (PRA-10022-1MS)**Accessory**

---



---

Remote controller for the motion  
sensor - 1-10V  
**A14291**

---



---

Anchor bolt  
**A12091**

---