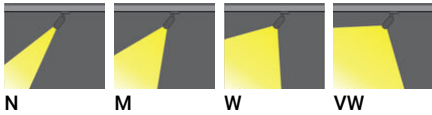



**BELIZE 3** (BEZ-80021)**Product description**

Ø90 - 274 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Adjustable: Tilt 180°, Rotation 360°
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- High-efficiency optical reflector or high-efficiency polycarbonate lens
- Integral control gear
- With 3-phase universal adapter

**Optic****Product colour**

**BELIZE 3** (BEZ-80021)


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	1 COB
<b>Power</b>	30 W
<b>Lumen</b>	2562 - 2969 lm
<b>Efficacy</b>	85 - 99 lm/W
<b>Driver option</b>	Integral control gear

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	N, M, W, VW
<b>Optic value</b>	19°, 32°, 50°, 60°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Dimming type</b>	On/Off, DALI


<b>Product colours</b>	Black, White
<b>Weight</b>	0.8 kg
<b>Operating temperature</b>	-20 °C to 50 °C
<b>Lens / Reflector / Optic</b>	High-efficiency optical reflector or high-efficiency polycarbonate lens

BEZ-80021

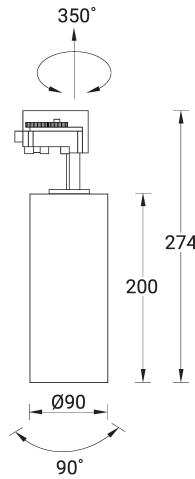

**BELIZE 3** (BEZ-80021)**Accessory**

---



---

Honeycomb louvre  
**A80117**

---



---

Surface mounted track adapter -  
Black DA  
**A80119**

---



---

Surface mounted track adapter -  
White DA  
**A80120**

---



---

Surface mounted track adapter -  
Black ND  
**A80122**

---



---

Surface mounted track adapter -  
White ND  
**A80123**

---