

ITAC 2 (IT-31973)



Product description

Dome diffuser - Tunable White



microPrim™



Luminaire Structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour

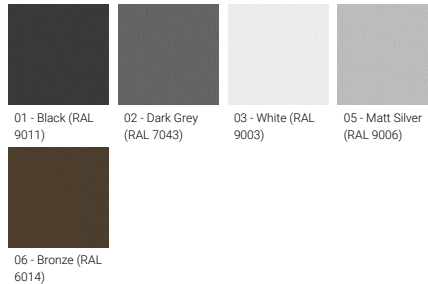

Special finishes upon request

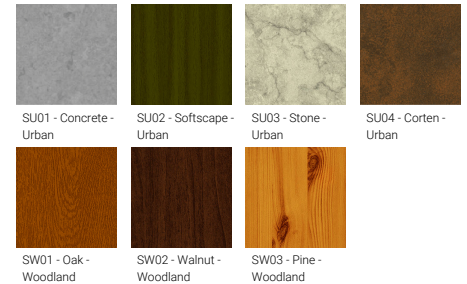


ITAC 2 (IT-31973)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	160 LED	Optic value	116°x116°	Weight	2.9 kg
Power	20 W	CCT / CRI	TW (2700K - 6500K)	Operating temperature	-20 °C to 50 °C
Lumen	1713 lm	Bug	B1-U3-G1	Through wiring	Two cable entries for through wiring
Efficacy	86 lm/W	ULR	9.25	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Driver option	Integral control gear	ULOR	9.25	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	CIE flux code n°3	94		
Input voltage	220-240 V 50/60 Hz	Dimming type	DALI		

IT-31973

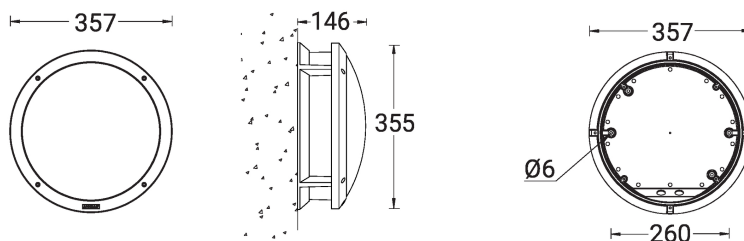

ITAC 2 (IT-31973)**Accessory**



Surface mounting box for easy
cabling (ITAC 2)
SCE-ITAC-2
