

**LADOR 32 (LD-80041) (Version 1)**



**Product description**

With remote driver IP-rated - Constant voltage (CV) 24 V - 62x62 mm - Class III - RGBW



microPrim™

**Luminaire Structure**


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Remote driver (included)

**Optic**




M

**Product colour**

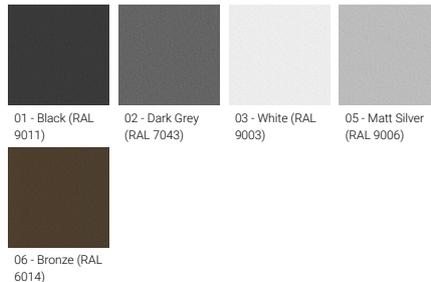

**Special finishes upon request**

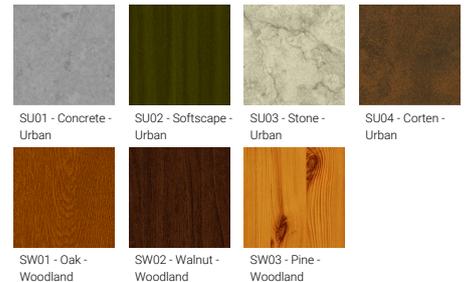

**LADOR 32 (LD-80041) (Version 1)**


**Technical information**

|                      |                          |
|----------------------|--------------------------|
| <b>Material</b>      | Aluminium                |
| <b>Light source</b>  | 1 LED                    |
| <b>Power</b>         | 4 W                      |
| <b>Lumen</b>         | 166 - 170 lm             |
| <b>Efficacy</b>      | 42 - 43 lm/W             |
| <b>Driver option</b> | Remote driver (included) |
| <b>Driver</b>        | Constant voltage (CV)    |

|                        |  |
|------------------------|--|
| <b>Input voltage</b>   | 24 VDC   |
| <b>Optic</b>           | M  |
| <b>Optic value</b>     | 34°  |
| <b>CCT / CRI</b>       | RGBW30, RGBW40   |
| <b>Dimming type</b>    | DMX, DMX/RDM   |
| <b>Product colours</b> | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>          | 0.7 kg   |

|                                 |   |
|---------------------------------|---|
| <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Cable</b>                    | One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable   |
| <b>Through wiring</b>           | Single cable entry, through wiring upon request   |
| <b>Lens / Reflector / Optic</b> | Clear toughened glass, High-efficiency PMMA lens  |
| <b>Variants (DMX/RDM)</b>       | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

LD-80041

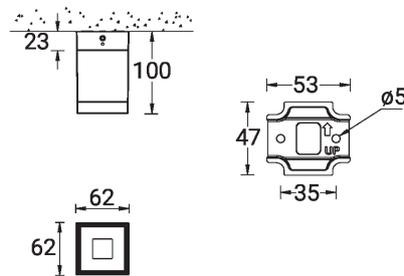

**Accessory**

---



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**