

NIKON 6 (NI-80122-A)



Product description

Integral control gear - Square - Aluminium frame




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in stainless steel or aluminium
- Single cable entry, through wiring upon request

- One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Integral control gear

Optic



N M VW E

Product colour



01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

NIKON 6 (NI-80122-A)



Technical information

Material	Aluminium
Light source	MR16-GU10
Power	8 W
Lumen	369 - 455 lm
Efficacy	49 - 61 lm/W
Driver option	Integral control gear

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, VW, E
Optic value	10°, 25°, 60°, 10°x60°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off

Product colours	Black, Dark Grey, White, Matt Silver, Bronze
Weight	0.5 kg
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass

NI-80122-A

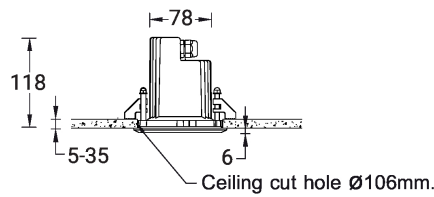

NIKON 6 (NI-80122-A)**Accessory**



Concrete box modification upon
request

CONCRETE-BOX
