


**NYBRO 10 (NYB-90325)**



**Product description**

Down (Optic) & Up (Optic 2nd) - 60x95 mm - 1178 mm  
- RGBW

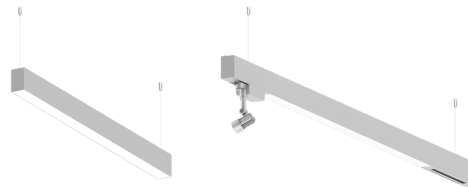

microPrim™

**Luminaire Structure**

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Stainless steel brackets and screws for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)
- Track can be integrated into NYBRO products upon request and upon receipt of design drawings


**Optic**



**Product colour**



**Special finishes upon request**

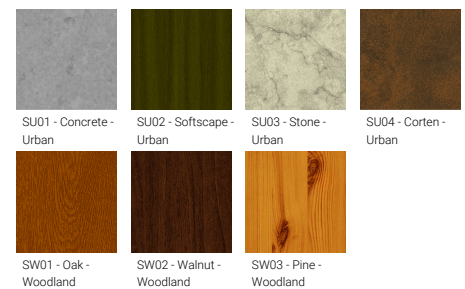

**NYBRO 10 (NYB-90325)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	192 & 176 LED
<b>Power</b>	81 W
<b>Lumen</b>	5566 lm
<b>Efficacy</b>	69 lm/W
<b>Driver option</b>	Integral control gear

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	O, P
<b>Optic value</b>	Opal, Micro-prismatic
<b>Optic (2nd)</b>	O
<b>Optic (2nd) value</b>	Opal


<b>CCT / CRI</b>	RGBW40
<b>Dimming type</b>	Bluetooth
<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.3 kg
<b>Operating temperature</b>	-20 °C to 40 °C

NYB-90325

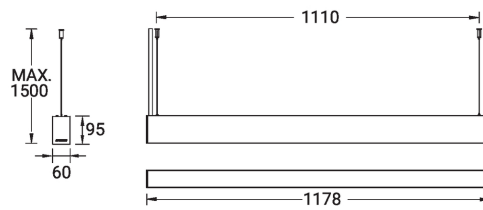

**NYBRO 10 (NYB-90325)****Accessory**

Continuous-coupler bracket  
(60/70 mm Down & 60 mm  
Down & Up profile)  
**A81581**

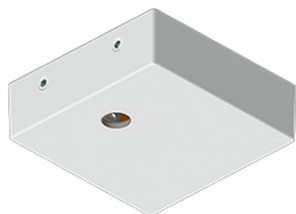


Supply cable surface mounting  
box  
**A80981**



Xpress wireless switch  
**A90591**



Integrated track - 3 phase - DALI  
for NYBRO  
**A81491**

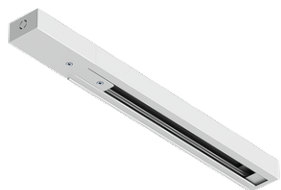

Integrated track - 3 phase - On-  
off for NYBRO  
**A81391**



DALI Control System  
**Control-DALI**