

ODESSA 21 (OD-21062)



Product description

Large - Supplied with specific 6 m cylindrical, straight aluminium pole: APD160140-OD




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h

Optic



Product colour



Special finishes upon request




ODESSA 21 (OD-21062)

Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 4 x 1 COB |
| Power | 280 W |
| Lumen | 29696 - 34744 lm |
| Efficacy | 108 - 126 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |

| | |
|--------------------------|---------------------------------------|
| Optic | N, M, W, VW |
| Optic value | 20°, 32°, 43°, 69° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B3-U0-G1, B4-U0-G0 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 100, 99 |
| Dimming type | On/Off, 1-10V, DALI |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 50.0 kg |
| Operating temperature | -20 °C to 40 °C |
| EPA (m2) | 1.029 |
| Cable | One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | High-efficiency optical reflector, Clear toughened glass |
| Variants (On/Off, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

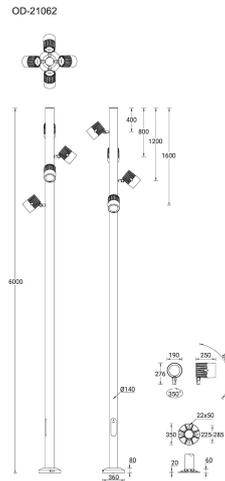

ODESSA 21 (OD-21062)**Accessory**



Anti glare visor
A54331



Anti glare louvre
A54531



Linear spread lens
A51814



Honeycomb louvre
A54121



Root mount kit
A20691



DALI Control System
Control-DALI

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)



6 m - Cylindrical, straight
aluminium pole for ODESSA
APD160140-OD