

PITTSBURGH 4 (PIB-30006)



Product description

Small - RGBW




microPrim™


Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV


Optic

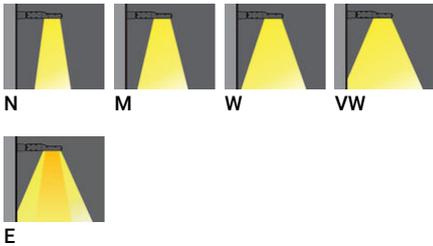

Product colour

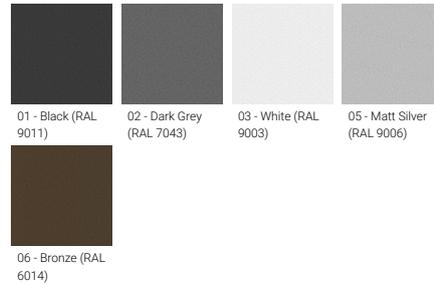

Special finishes upon request

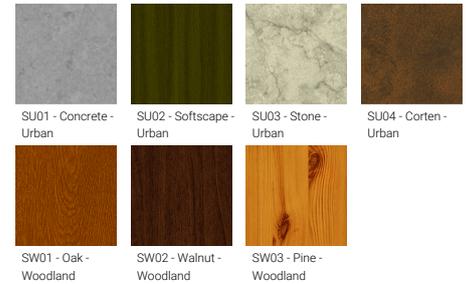


PITTSBURGH 4 (PIB-30006)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	100
Light source	36 LED	Optic	N, M, W, VW, E	Dimming type	DMX/RDM
Power	72 W	Optic value	8°, 14°, 29°, 72°, 43°x9°	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	3938 - 5110 lm	CCT / CRI	RGBW30, RGBW40		
Efficacy	55 - 71 lm/W	Bug	B3-U0-G0, B4-U0-G0		
Driver option	Integral control gear	ULR	<1%		
Driver	Constant current (CC)	ULOR	<1%	Weight	5.5 kg
				Operating temperature	-20 °C to 40 °C
				Through wiring	Single cable entry
				Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens

PIB-30006

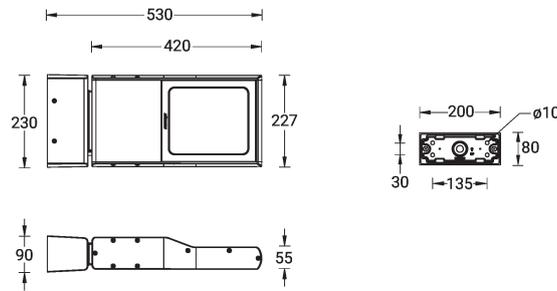

Accessory



DMX/RDM Control System
Control-DMX-RDM
