

SMITH 4 (SM-10701-1MS)



Product description

Square - 186x186 - 1200 mm - IP65 - With integrated motion sensor - 1 side



Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear

Optic



G

Product colour

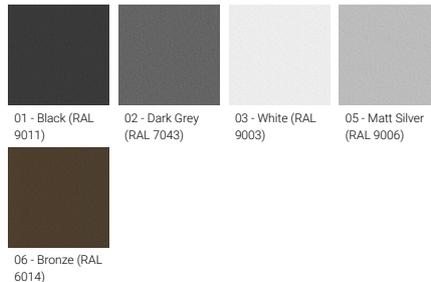

Special finishes upon request



SMITH 4 (SM-10701-1MS)


Technical information

Material	Aluminium
Light source	4 x 32 LED
Power	38 W
Lumen	3938 - 4234 lm
Efficacy	104 - 111 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G


Optic value	360°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U5-G3
ULR	50%
ULOR	50%
CIE flux code n°3	67
Dimming type	1-10V
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	9.6 kg

Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 23,000
Lifetime L80B10 (hours)	> 45,000
Lifetime L80B50 (hours)	> 50,000

SMITH
Adjustable sensor (5 seconds - 30 minutes)
30° - 150° Sensitivity
Sensor detection area: 9 m

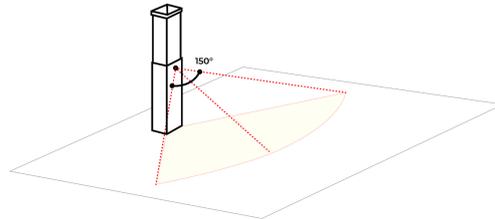

SM-10701-1MS



SMITH 4 (SM-10701-1MS)**Accessory**



Anchor bolt
A10391



Remote controller for the motion
sensor - 1-10V
A14291
