

BRISBANE 6 (BRB-80002)**Product description**

Ø80 mm



optic: N



optic: M



optic: W

Luminaire Structure


- Extruded aluminium housing with powder coating
- Reflector finishes options (Satin black, Satin gold, Matt white)

- Thin 1.3mm white polycarbonate trim
- Remote driver (included)

- CRI 95

Optic

N M W

Product colour

01 - Black (RAL 9011) 03 - White (RAL 9003)


BRISBANE 6 (BRB-80002)

Technical information

Material	Aluminium
Light source	1 COB
Power	14 W
Lumen	1330 - 1356 lm
Efficacy	95 - 97 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	N, M, W
Optic value	24°, 35°, 50°
CCT / CRI	3000K CRI95, 4000K CRI95
Bug	B1-U0-G0
ULR	<1%
ULOR	<1%

CIE flux code n°3	100
Dimming type	On/Off
Product colours	Black, White
Weight	1.2 kg
Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Reflector finishes options (Satin black, Satin gold, Matt white), Thin 1.3mm white polycarbonate trim

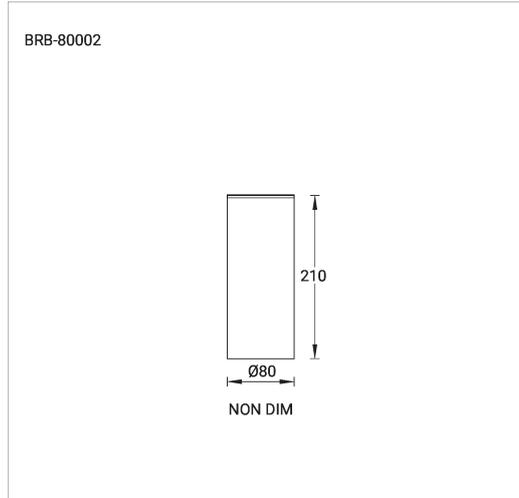

BRISBANE 6 (BRB-80002)**Accessory**



Reflector finish (Matt white)
A80023-MW



Reflector finish (Satin black)
A80023-SB



Reflector finish (Satin gold)
A80023-SG
