


ECO 1 (EC-40571)



Product description

With recessing box

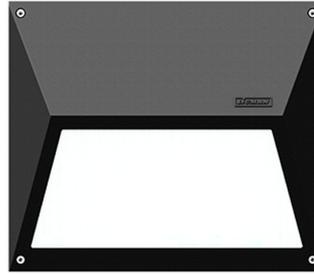


microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Toughened linear spread lens
- Integral control gear

Optic



G

Product colour



Special finishes upon request




ECO 1 (EC-40571)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	3 COB	Optic value	61°x114°			
Power	23 W	CCT / CRI	3000K CRI80, 4000K CRI80			
Lumen	713 - 769 lm	Bug	B0-U2-G1			
Efficacy	31 - 33 lm/W	ULR	8%			
Driver option	Integral control gear	ULOR	8%			
Driver	Constant current (CC)	CIE flux code n°3	90			
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI			
					Weight	4.8 kg
					Operating temperature	-20 °C to 40 °C
				Through wiring	Two cable entries for through wiring	
				Lens / Reflector / Optic	Toughened linear spread lens	
				MacAdam Ellipse	3 SDCM	
				Lifetime L90B10 (hours)	> 50,000	
				Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	

EC-40571

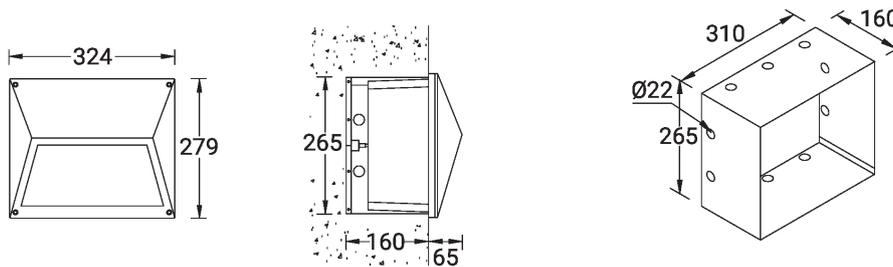

Accessory



DALI Control System
Control-DALI
