


**LIGHTALK 8 (LA-30022)**



**Product description**

Without remote box IP-rated - With remote driver - Constant current (CC) 500 mA - 1205 mm - Class I




microPrim™


**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal

**Optic**

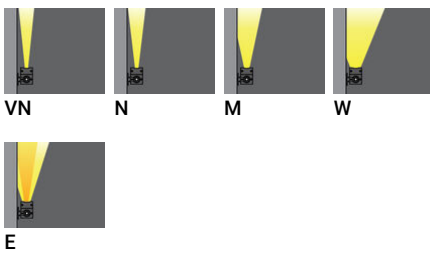

**Product colour**

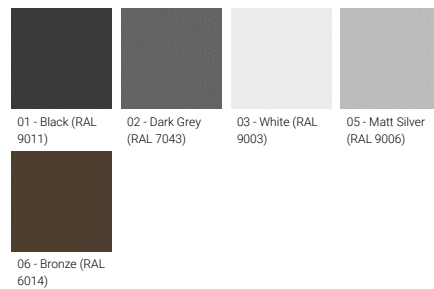

**Special finishes upon request**




**LIGHTALK 8 (LA-30022)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	36 LED
<b>Power</b>	55 W
<b>Lumen</b>	3908 - 5703 lm
<b>Efficacy</b>	71 - 104 lm/W
<b>Driver option</b>	Remote driver (included)
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	VN, N, M, W, E

<b>Optic value</b>	12°, 14°, 24°, 42°, 18° x 35°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>ULR</b>	100%
<b>ULOR</b>	100%
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable

<b>Through wiring</b>	Single cable entry, through wiring upon request
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 120,000
<b>Lifetime L80B10 (hours)</b>	> 120,000
<b>Lifetime L80B50 (hours)</b>	> 120,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

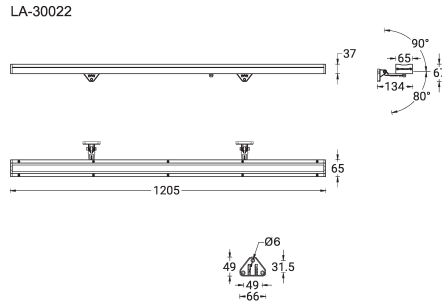

**LIGHTALK 8 (LA-30022)****Accessory**

---



---

75 mm extend arm mounting  
**A30891**

---



---

150 mm extend arm mounting  
**A30991**

---



---

300 mm extend arm mounting  
**A31091**

---



---

450 mm extend arm mounting  
**A31191**

---



---

DALI Control System  
**Control-DALI**

---