


PALETTA 3 (PA-31574)



Product description

265x265 mm - Tunable White




microPrim™

Luminaire Structure


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour

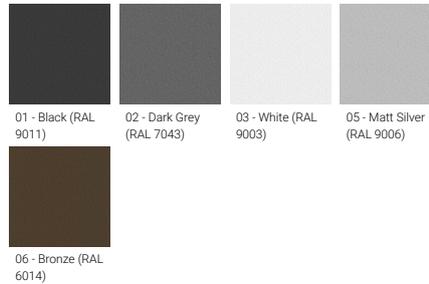

Special finishes upon request

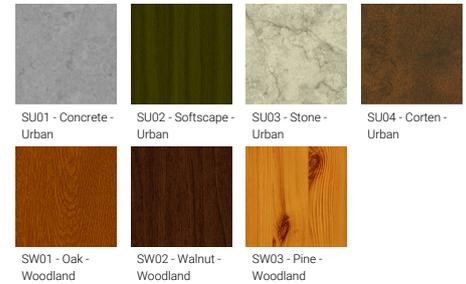


PALETTA 3 (PA-31574)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	94
Light source	160 LED	Optic	G	Dimming type	DALI
Power	20 W	Optic value	117°	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	1590 lm	CCT / CRI	TW (2700K - 6500K)		
Efficacy	80 lm/W	Bug	B1-U2-G1		
Driver option	Integral control gear	ULR	2%	Weight	3.0 kg
Driver	Constant current (CC)	ULOR	2%	Through wiring	Two cable entries for through wiring
				Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser

PA-31574

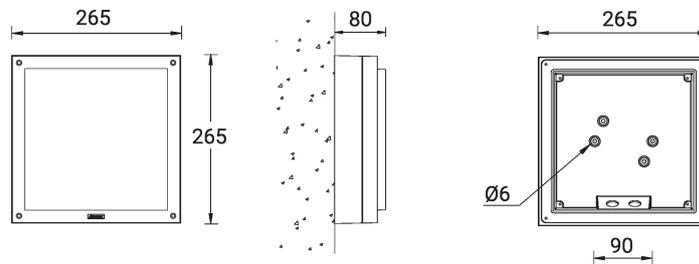

PALETTA 3 (PA-31574)**Accessory**



Surface mounting box for easy
cabling (PALETTA 3)
SCE-PALETTA-3
