

PITTSBURGH 1 (PIB-50003) (Version 1)



Product description

Small



microPrim™


Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Galvanized steel arm mounted
- Thermal heat dissipation body
- Single cable entry, through wiring upon request


- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency polycarbonate lens
- Clear toughened glass

- Integral control gear
- Surge protection 10kV


Optic

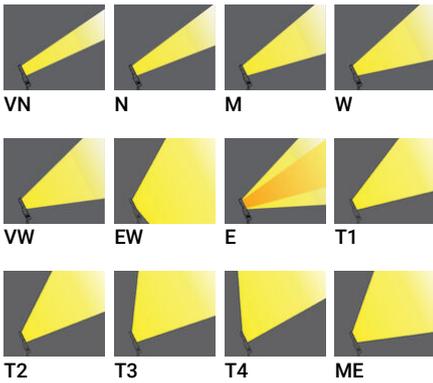

Product colour

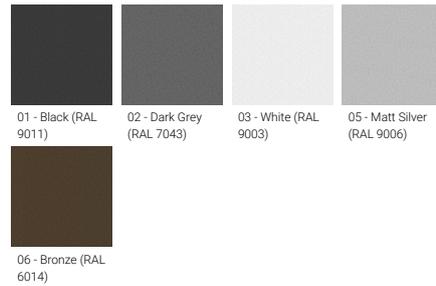


Special finishes upon request

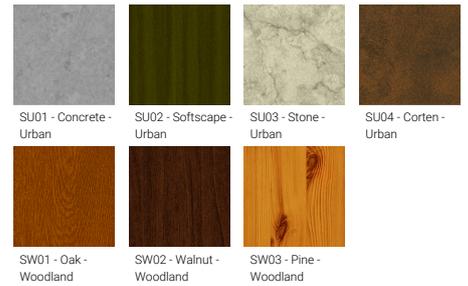

PITTSBURGH 1 (PIB-50003) (Version 1)
Technical information

Material	Aluminium	Optic value	5°, 12°, 25°, 53°, 65°, 106°, 94°x28°, 145°x67°, 137°x40°, 132°x32°, 94°x64°, 124°x60°	Operating temperature	-20 °C to 50 °C
Light source	36 LED	CCT / CRI	3000K CRI80, 4000K CRI80	EPA (m2)	0.101
Power	73 W	Bug	B1-U0-G1, B2-U0-G1, B2-U0-G2, B3-U0-G0, B3-U0-G1, B4-U0-G0, B4-U0-G1	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Lumen	6228 - 10381 lm	ULR	<1%	Through wiring	Single cable entry, through wiring upon request
Efficacy	85 - 142 lm/W	ULOR	<1%	Lens / Reflector / Optic	High-efficiency polycarbonate lens, Clear toughened glass
Driver option	Integral control gear	CIE flux code n°3	100, 97, 98, 99	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 120,000
Input voltage	220-240V 50/60Hz		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	VN, N, M, W, VW, EW, E, T1, T2, T3, T4, ME	Product colours		Weight	5.5 kg

PIB-50003

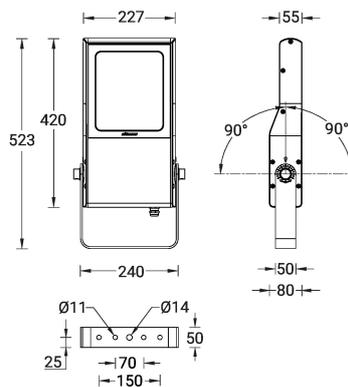

Accessory



Anti-glare visor
A54731



Anti-glare louvre
A54831

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.