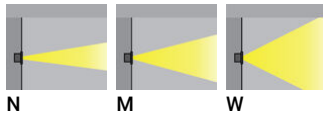


AQUA 3 (AQ-60021) (Version 1)**Product description**

Without remote box IP-rated - With remote driver /
recessing box - Constant current (CC) 2670 mA

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

Optic**Product colour**

00 - Stainless Steel

AQUA 3 (AQ-60021) (Version 1)


Technical information

Material	Stainless Steel
Light source	1 COB
Power	38 W
Lumen	3140 - 3380 lm
Efficacy	83 - 89 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	2670 mA, 12 VDC

Optic	N, M, W
Optic value	24°, 36°, 39°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U4-G4, B0-U5-G4
ULR	<1%
ULOR	<1%
CIE flux code n°3	44, 47, 48
Dimming type	On/Off, 1-10V

Product colours	Stainless Steel
Weight	3.8 kg
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass

AQ-60021

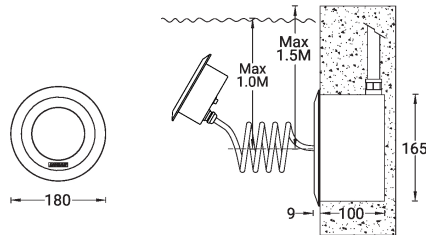

AQUA 3 (AQ-60021) (Version 1)

Accessory



DALI Control System
Control-DALI



Remote box IP65
A61851