

CAPSULE 3 (CA-30325-1MS)



Product description


With integrated motion sensor




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear

Optic



Product colour

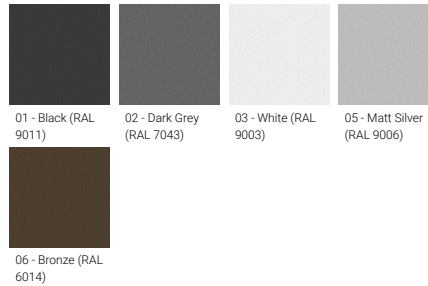

Special finishes upon request



CAPSULE 3 (CA-30325-1MS)



Technical information

Material	Aluminium
Light source	96 LED
Power	15 W
Lumen	1518 - 1597 lm
Efficacy	101 - 106 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G

Optic value	126°x163°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U3-G1
ULR	14%
ULOR	14%
CIE flux code n°3	85
Dimming type	On/Off, 1-10V
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.2 kg

Operating temperature	-20 °C to 50 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 37,000
Lifetime L80B10 (hours)	> 78,000
Lifetime L80B50 (hours)	> 86,000
Variants (On/Off, 1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

CA-30325-1MS



- CAPSULE**
- MacAdam Ellipse - Macoson - 1-10V**
 Adjustable beam (0° beam) - 11° (1m/10m)
 EIP 2m/10m
 Sensor detector 4m
 CA-30325-1MS (2.2 - 4.8 m)
 CA-30325-1MS (2.6 - 7.2 m)
 CA-30325-1MS (3.0 - 4.8 m)
 CA-30325-1MS (3.4 - 4.8 m)
 - MacAdam Ellipse - Macoson - On/Off**
 Adjustable beam (0° beam) - 11° (1m/10m)
 EIP 2m/10m
 Sensor detector 4m
 CA-30325-1MS (2.2 - 4.8 m)
 CA-30325-1MS (2.6 - 7.2 m)
 CA-30325-1MS (3.0 - 4.8 m)
 CA-30325-1MS (3.4 - 4.8 m)

CAPSULE 3 (CA-30325-1MS)

Accessory



DALI Control System
Control-DALI



Remote controller for the motion
sensor - 1-10V (A34191)
A34391
