

**LIGHTALK 19** (LA-95052) (Version 1)



**Product description**

Without remote driver - Constant voltage (CV) 24 V - 1205 mm - Class III - RGBW




microPrim™


**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable and 2x0.3 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


**Optic**

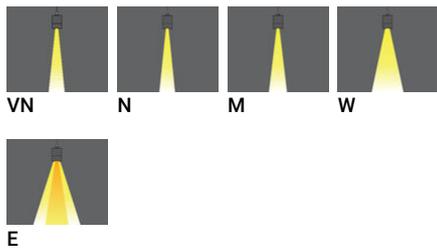

**Product colour**

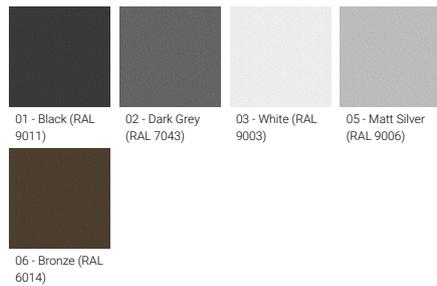

**Special finishes upon request**

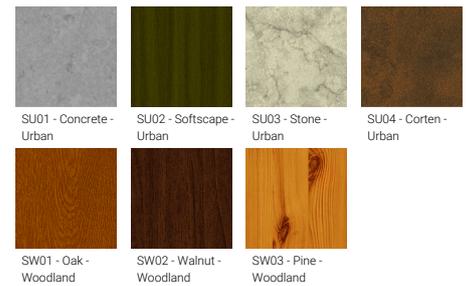


**LIGHTALK 19** (LA-95052) (Version 1)

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	40 LED
<b>Power</b>	66 W
<b>Lumen</b>	3477 - 4043 lm
<b>Efficacy</b>	53 - 61 lm/W
<b>Driver option</b>	Remote driver (not included)
<b>Driver</b>	Constant voltage (CV)
<b>Input voltage</b>	24 VDC

<b>Optic</b>	VN, N, M, W, E
<b>Optic value</b>	10°, 13°, 25°, 43°, 18° x 35°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Dimming type</b>	DMX, DMX/RDM
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	5.3 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>EPA (m2)</b>	0.080

<b>Cable</b>	Four IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable and 2x0.3 m of 2x0.5 sqmm outdoor shielded cable
<b>Through wiring</b>	Two cable entries for through wiring
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>MacAdam Ellipse</b>	7 SDCM
<b>Lifetime L90B10 (hours)</b>	> 50,000
<b>Lifetime L80B10 (hours)</b>	> 68,000
<b>Lifetime L80B50 (hours)</b>	> 100,000

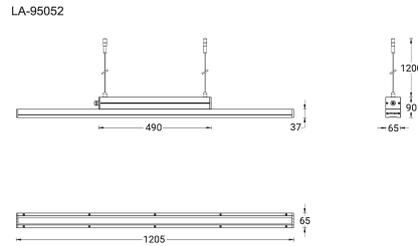

**Accessory**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**



Driver (CV) - On/Off - 36 W - IP67  
- 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67  
- 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**