

LADOR 32 (LD-80041) (Version 1)



Product description

With remote driver IP-rated - Constant voltage (CV) 24 V - 62x62 mm - Class III - RGBW



microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Remote driver (included)

Optic




M

Product colour



Special finishes upon request

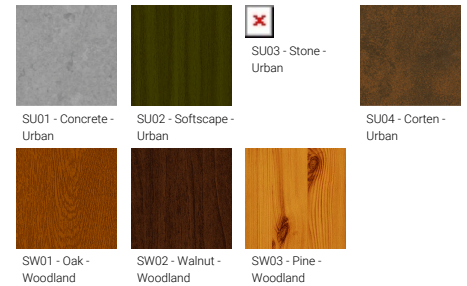

LADOR 32 (LD-80041) (Version 1)


Technical information

Material	Aluminium
Light source	1 LED
Power	4 W
Lumen	166 - 170 lm
Efficacy	42 - 43 lm/W
Driver option	Remote driver (included)
Driver	Constant voltage (CV)

Input voltage	24 VDC
Optic	M
Optic value	34°
CCT / CRI	RGBW30, RGBW40
Dimming type	DMX, DMX/RDM
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.7 kg

Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LD-80041

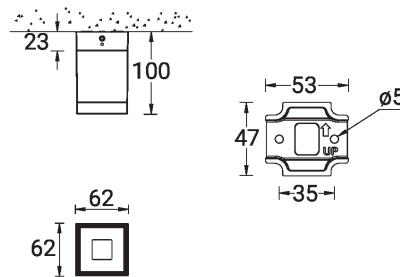

LADOR 32 (LD-80041) (Version 1)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM