


**MIC 3 (MI-50383)**



**Product description**

Medium




microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


**Optic**

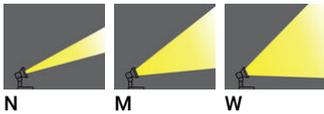

**Product colour**

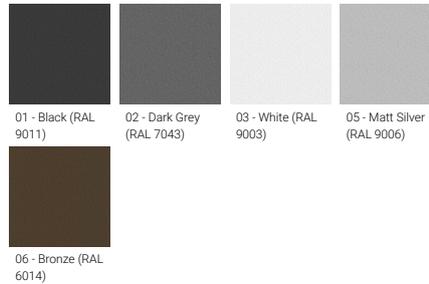

**Special finishes upon request**

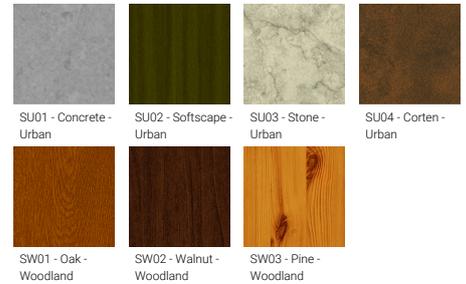

**MIC 3 (MI-50383)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 24 LED                |
| <b>Power</b>         | 38 W                  |
| <b>Lumen</b>         | 3634 - 4265 lm        |
| <b>Efficacy</b>      | 96 - 112 lm/W         |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |

|                              |  |
|------------------------------|--|
| <b>Optic</b>                 | N, M, W  |
| <b>Optic value</b>           | 15°, 26°, 45°  |
| <b>CCT / CRI</b>             | 3000K CRI80, 4000K CRI80   |
| <b>Dimming type</b>          | On/Off, 1-10V, DALI  |
| <b>Product colours</b>       | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>                | 3.9 kg   |
| <b>Operating temperature</b> | -20 °C to 40 °C  |
| <b>Through wiring</b>        | Single cable entry   |

|                                 |   |
|---------------------------------|---|
| <b>Lens / Reflector / Optic</b> | High-efficiency PMMA lens, Clear toughened glass  |
| <b>MacAdam Ellipse</b>          | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>  | > 120,000   |
| <b>Lifetime L80B10 (hours)</b>  | > 120,000   |
| <b>Lifetime L80B50 (hours)</b>  | > 120,000   |
| <b>Variants (1-10V, DALI)</b>   | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

MI-50383

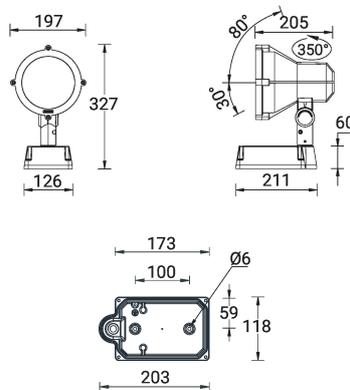

**MIC 3** (MI-50383)**Accessory**

---



---

Anti-glare visor  
**A50231**

---



---

Anti-glare hood  
**A51631**

---



---

Ground spike  
**A50141**

---

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.