

PRAGUE 3 (PRA-10022-1MS)



Product description

260x75 mm - 1000 mm - With integrated motion sensor - 1 side



microPrim™




DARKSKY APPROVED
Reduces light pollution
Certified by DarkSky.org




Luminaire Structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

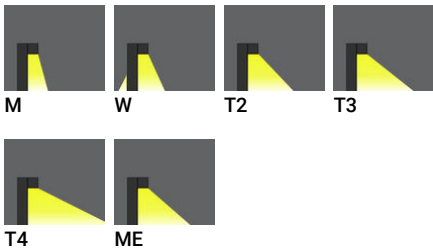

Product colour

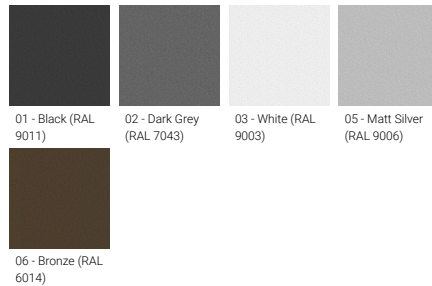

Special finishes upon request

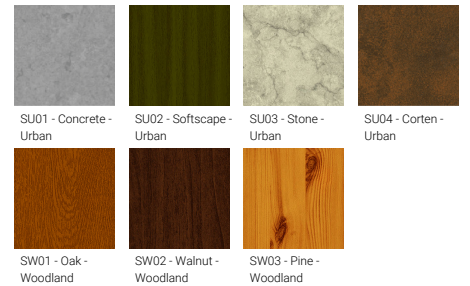

PRAGUE 3 (PRA-10022-1MS)


Technical information

| | |
|----------------------|--------------------------|
| Material | Aluminium |
| Light source | 12 LED |
| Power | 20 W |
| Lumen | 1938 - 2391 lm |
| Efficacy | 102 - 126 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | M, W, EW, T2, T3, T4, ME |


| | |
|--------------------------|--|
| Optic value | 30°x20°, 54°x33°, 104°x66°, 139°x56°, 126°x65°, 103°x68°, 137x57° |
| CCT / CRI | 2700K CRI80, 3000K CRI80, 4000K CRI80 |
| Bug | B0-U2-G1, B0-U3-G1, B1-U3-G1 |
| ULR | 2%, 3%, 7%, 8%, 9% |
| ULOR | 2%, 3%, 7%, 8%, 9% |
| CIE flux code n°3 | 95, 97 |
| Dimming type | 1-10V |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 10.4 kg |

| | |
|---------------------------------|--|
| Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 90,000 |
| Lifetime L80B10 (hours) | > 90,000 |
| Lifetime L80B50 (hours) | > 90,000 |

PRAGUE
Adjustable sensor (5 seconds - 30 minutes)
30° - 150° Sensitivity
Sensor detection area: 9 m

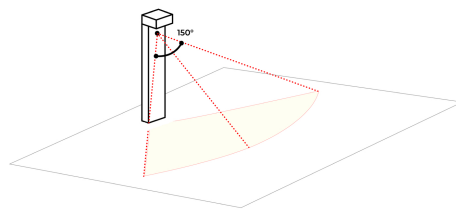

PRA-10022-1MS

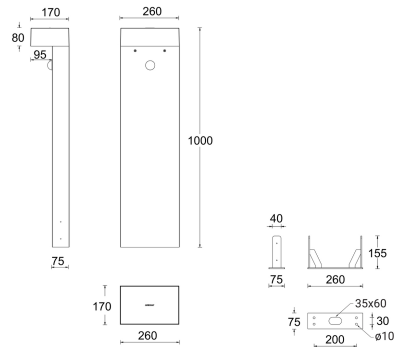

PRAGUE 3 (PRA-10022-1MS)**Accessory**



Remote controller for the motion
sensor - 1-10V
A14291



Anchor bolt
A12091
