

QUANTUM 3 (QA-50021)



Product description

Large



microVos microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass

- Integral control gear


Optic

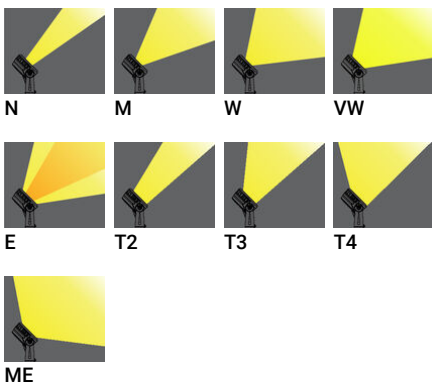

Product colour

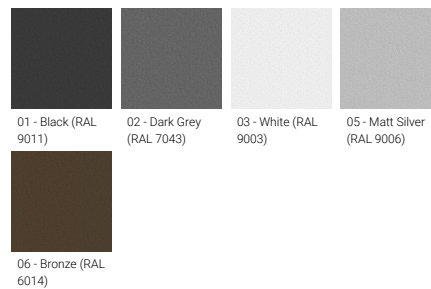

Special finishes upon request

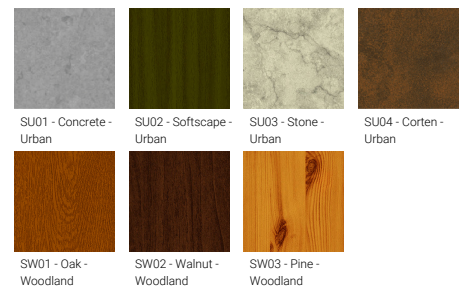

QUANTUM 3 (QA-50021)


Technical information

Material	Aluminium
Light source	96 LED
Power	269 W
Lumen	20024 - 27436 lm
Efficacy	74 - 102 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	N, M, W, VW, E, T2, T3, T4, ME
Optic value	10°, 18°, 26°, 70°, 44°x13°, 146°x41°, 63°x146°, 69°x102°, 57°x142°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B4-U0-G4, B5-U0-G0, B5-U0-G1, B5-U0-G5
ULR	<1%
ULOR	<1%
CIE flux code n°3	100, 97, 99
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	16.0 kg
Operating temperature	-20 °C to 35 °C
EPA (m2)	0.256
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

QA-50021

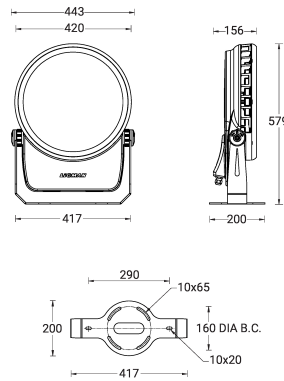

QUANTUM 3 (QA-50021)**Accessory**



Anti-glare hood
A53531



Anti-glare louvre
A53431



Anti-glare visor
A53331



Linear spread lens
A51514



DALI Control System
Control-DALI

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.