

SANDY 10 (SA-31563)



Product description

Large - Tunable White




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



G

Product colour



Special finishes upon request




SANDY 10 (SA-31563)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	192 LED	Optic value	109°x114°	Weight	4.3 kg
Power	28 W	CCT / CRI	TW (2700K - 6500K)	Operating temperature	-20 °C to 40 °C
Lumen	1149 lm	Bug	B0-U3-G2	Through wiring	Two cable entries for through wiring
Efficacy	41 lm/W	ULR	35	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Driver option	Integral control gear	ULOR	35	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	CIE flux code n°3	74		
Input voltage	220-240 V 50/60 Hz	Dimming type	DALI		

SA-31563

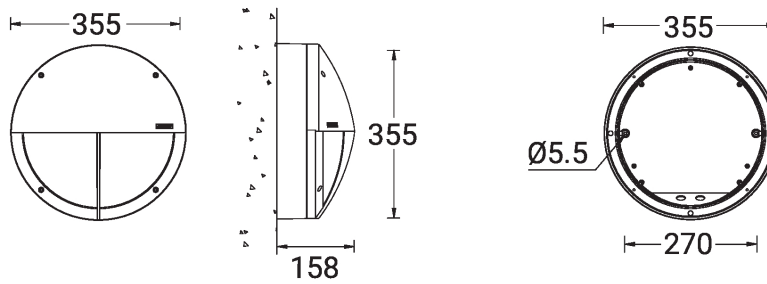

SANDY 10 (SA-31563)**Accessory**



Surface mounting box for easy
cabling (SANDY 10)
SCE-SANDY-10
