

**NIKON 5 (NI-80042-S)**



**Product description**


Integral control gear - Round - Stainless steel frame



**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in stainless steel or aluminium
- Single cable entry, through wiring upon request
- One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

**Optic**

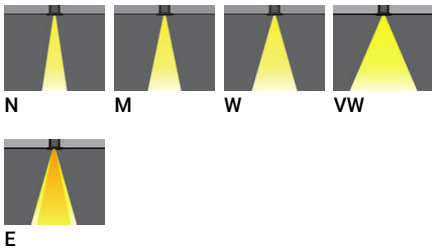

**Product colour**



00 - Stainless Steel

**NIKON 5 (NI-80042-S)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Stainless Steel       |
| <b>Light source</b>  | MR16-GU10             |
| <b>Power</b>         | 8 W                   |
| <b>Lumen</b>         | 369 - 455 lm          |
| <b>Efficacy</b>      | 49 - 61 lm/W          |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |

|                          |  |
|--------------------------|--|
| <b>Optic</b>             | N, M, W, VW, E                                     |
| <b>Optic value</b>       | 10°, 25°, 36°, 60°, 10°x60°                        |
| <b>CCT / CRI</b>         | 3000K CRI80, 3000K CRI95, 4000K CRI80, 4000K CRI95 |
| <b>Bug</b>               | B0-U1-G0, B1-U1-G0                                 |
| <b>ULR</b>               | <1%  |
| <b>ULOR</b>              | <1%  |
| <b>CIE flux code n°3</b> | 100  |
| <b>Dimming type</b>      | On/Off   |

|                                 |   |
|---------------------------------|---|
| <b>Product colours</b>          | Stainless Steel   |
| <b>Weight</b>                   | 0.6 kg  |
| <b>Operating temperature</b>    | -20 °C to 40 °C   |
| <b>Cable</b>                    | One cable gland supplied with 1.5 m of 3x1.0 sqmm outdoor cable |
| <b>Through wiring</b>           | Single cable entry, through wiring upon request                 |
| <b>Lens / Reflector / Optic</b> | Clear toughened glass   |

NI-80042-S

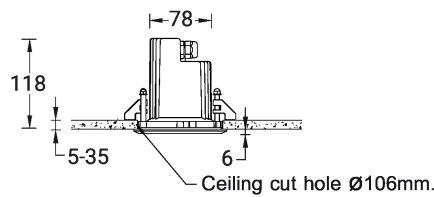

**NIKON 5** (NI-80042-S)**Accessory**

---



---

Concrete box modification upon  
request

**CONCRETE-BOX**

---