



BERLIN 1 (BEB-80021)**Product description**

Medium

**Luminaire Structure**

- Die-cast aluminium housing heat sink
- Adjustable: Tilt 2x90°, Rotation 350°
- With powder coating
- Aluminium reflector
- Integral control gear
- With 3-phase universal adapter

Optic**Product colour**

BERLIN 1 (BEB-80021)


Technical information

Material	Aluminium
Light source	1 COB
Power	30 W
Lumen	1901 - 2106 lm
Efficacy	63 - 70 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW
Optic value	15°, 24°, 30°, 51°
CCT / CRI	3000K CRI90, 4000K CRI90
ULR	<1%
ULOR	<1%
CIE flux code n°3	100

Dimming type	On/Off, 1-10V, DALI
Product colours	Black, White
Weight	1.0 kg
Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Aluminium reflector
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BEB-80021

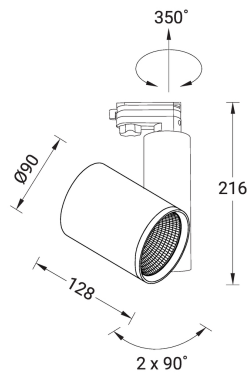

BERLIN 1 (BEB-80021)

Accessory



Honeycomb louvre
A80111



DALI Control System
Control-DALI