

**PRAGUE 2 (PRA-10011-SB)**



**Product description**

200x80 mm - 500 mm - With integrated security core (Anti-traffic)



microPrim™




**DARKSKY APPROVED**  
Reduces light pollution  
Certified by DarkSky.org

**SECURITY BOLLARDS**

**Luminaire Structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


**Optic**

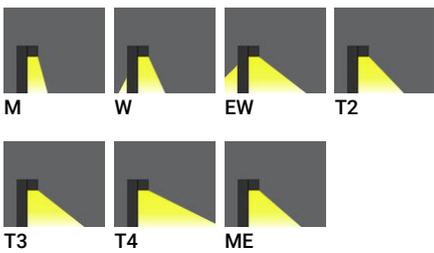

**Product colour**



**Special finishes upon request**

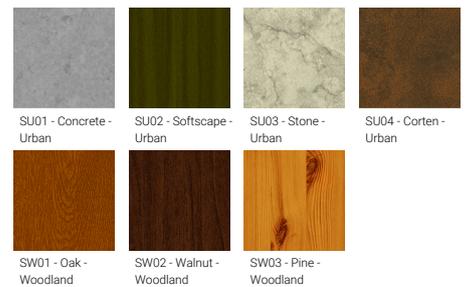

**PRAGUE 2 (PRA-10011-SB)**


**Technical information**

<b>Light source</b>	8 LED
<b>Power</b>	13.9 W
<b>Lumen</b>	1317 - 1594 lm
<b>Efficacy</b>	94 - 114 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	M, W, EW, T2, T3, T4, ME
<b>Optic value</b>	30°x21°, 53°x31°, 114°x63°, 140°x31°, 143°x53°, 129°x45°, 144°x37°

<b>CCT / CRI</b>	2700K CRI80, 3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U2-G0, B0-U2-G1, B0-U3-G1, B1-U3-G1
<b>ULR</b>	1%, 2%, 3%, 7%, 8%, 9%, <1%
<b>ULOR</b>	1%, 2%, 3%, 7%, 8%, 9%
<b>CIE flux code n°3</b>	95, 96, 97, 98
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	26.3 kg
<b>Operating temperature</b>	-20 °C to 40 °C

<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

PRA-10011-SB

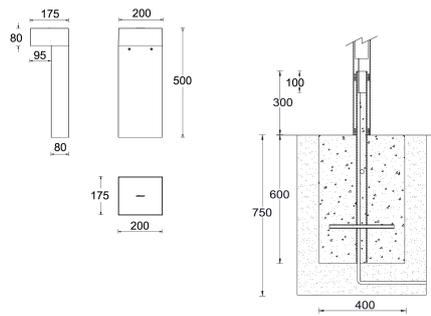

**PRAGUE 2** (PRA-10011-SB)

**Accessory**

---



DALI Control System  
**Control-DALI**

---