

SANDY 2 (SA-31482)



Product description

Small - Tunable White




microPrim™


Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Product colour

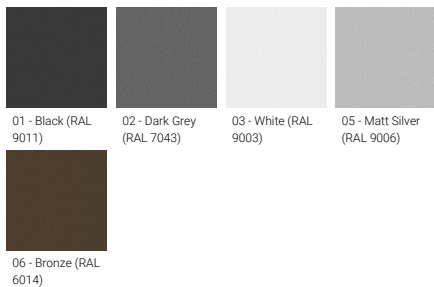

Special finishes upon request

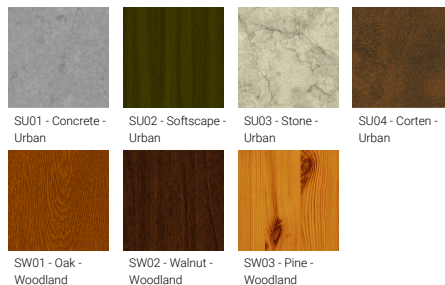

SANDY 2 (SA-31482)


Technical information

Material	Aluminium
Light source	160 LED
Power	20 W
Lumen	1685 lm
Efficacy	84 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz


Optic	G
Optic value	113°x113°
CCT / CRI	TW (2700K - 6500K)
Bug	B0-U4-G2
ULR	50
ULOR	50
CIE flux code n°3	68
Dimming type	DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.2 kg
Operating temperature	-20 °C to 40 °C
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

SA-31482

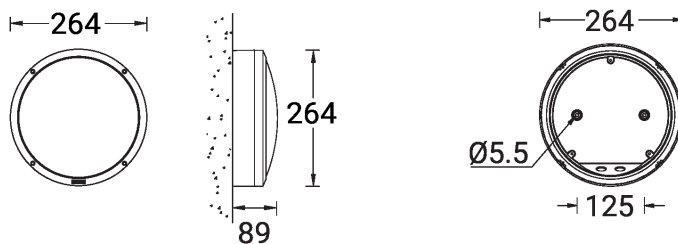

Accessory



Surface mounting box for easy
cabling (SANDY 2)
SCE-SANDY-2
