

VANCOUVER 60 (VA-20281)



Product description

240x240 mm - 3700 mm - Decorative pattern type 1 -
IP65 - With opal lens



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency polycarbonate lens
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Optic




G

Product colour

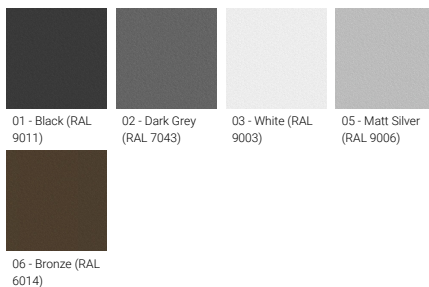

Special finishes upon request

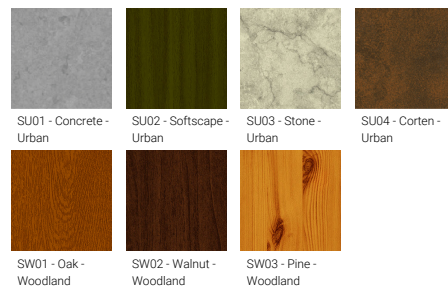


VANCOUVER 60 (VA-20281)

Technical information

Material	Aluminium	Optic	G	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Light source	12 x 32 LED	Optic value	360°	Through wiring	Single cable entry
Power	94 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	High-efficiency polycarbonate lens, Clear toughened glass
Lumen	4864 - 5120 lm	Dimming type	On/Off, 1-10V, DALI	MacAdam Ellipse	3 SDCM
Efficacy	49 - 51 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape	Lifetime L90B10 (hours)	> 23,000
Driver option	Integral control gear		- Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 45,000
Driver	Constant current (CC)			Lifetime L80B50 (hours)	> 50,000
Input voltage	220-240 V 50/60 Hz			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
		Weight	60.1 kg		
		Operating temperature	-20 °C to 40 °C		
		EPA (m2)	0.888		

VA-20281

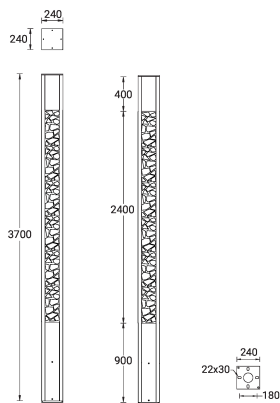

VANCOUVER 60 (VA-20281)

Accessory



Circuit breaker box IP44
A21291



Root mount kit
A21391



DALI Control System
Control-DALI