

**FORREY 30 (FOR-95022)**



**Product description**

Ø250 - 1046 mm - With louver




microPrim™


**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements


**Optic**



**Product colour**

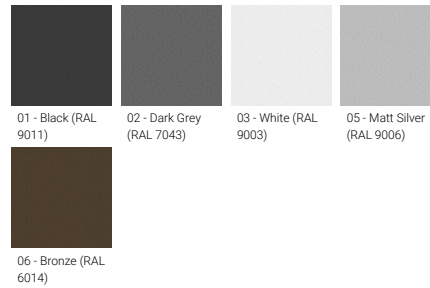

**Special finishes upon request**

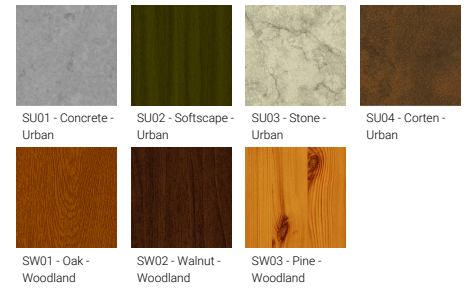


**FORREY 30 (FOR-95022)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	T2, T3, T4, T5	<b>Through wiring</b>	Two cable entries for through wiring
<b>Light source</b>	1 COB	<b>Optic value</b>	140°x100°, 132°x103°, 137°x117°, 73°	<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens
<b>Power</b>	48 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	3191 - 3711 lm	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L90B10 (hours)</b>	> 50,700
<b>Efficacy</b>	67 - 78 lm/W	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B10 (hours)</b>	> 63,500
<b>Driver option</b>	Integral control gear			<b>Lifetime L80B50 (hours)</b>	> 63,500
<b>Driver</b>	Constant current (CC)			<b>Variants (DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Weight</b>	6.8 kg		
		<b>Operating temperature</b>	-20 °C to 40 °C		
		<b>EPA (m2)</b>	0.145		

FOR-95022

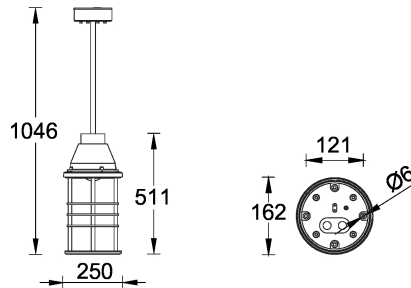

**FORREY 30** (FOR-95022)

**Accessory**

---



DALI Control System  
**Control-DALI**

---