

LBX 4 (LB-40447) (Version 1)



Product description

Without remote driver (CV) - With spring clamp -
Constant voltage (CV) 24 V - Class III



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included

Optic




G

Product colour



Special finishes upon request

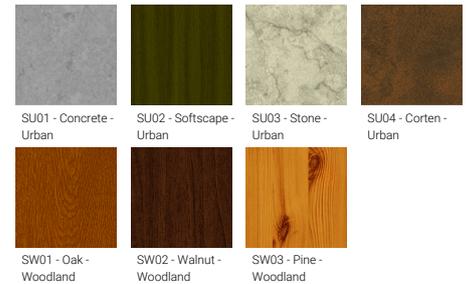

LBX 4 (LB-40447) (Version 1)


Technical information

Material	Aluminium
Light source	1 LED
Power	2 W
Lumen	39 lm
Efficacy	20 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC
Optic	G

Optic value	34° x 68°
CCT / CRI	3000K CRI80, 4000K CRI80
ULR	4%
ULOR	4%
CIE flux code n°3	97
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.3 kg
Operating temperature	-20 °C to 40 °C

Cable	One cable gland supplied with 0.3 m of 3x0.5 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000

LB-40447

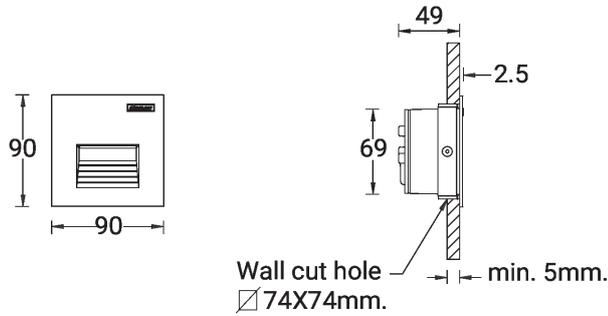

LBX 4 (LB-40447) (Version 1)**Accessory**



Remote box IP65
A80191



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND
