NORDSTROM 1 (NOD-50002) (Version 1)

CE | IP66 | IK08

Product description

With remote driver IP-rated - Constant voltage (CV) 24 V - 62x62 mm - Class III - RGBW
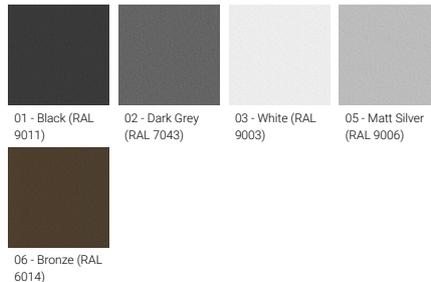
microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry

- One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens

- Clear toughened glass
- Remote driver (included)

Optic

M

Product colour

01 - Black (RAL 9011)
02 - Dark Grey (RAL 7043)
03 - White (RAL 9003)
05 - Matt Silver (RAL 9006)
06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban
SU02 - Softscape - Urban
SU03 - Stone - Urban
SU04 - Corten - Urban
SW01 - Oak - Woodland
SW02 - Walnut - Woodland
SW03 - Pine - Woodland

07:26, 26-02-2026

https://www.ligman.com/nordstrom-1-nod-50002/

GLP
Good Labour Practices

Technical information

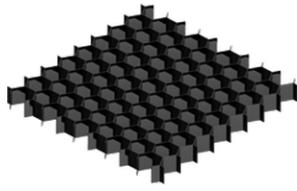|					
Material	Aluminium	Input voltage	24 VDC	Operating temperature	-20 °C to 40 °C
Light source	1 LED	Optic	M	EPA (m2)	0.011
Power	6 W	Optic value	34°	Cable	One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
Lumen	166 - 170 lm	CCT / CRI	RGBW30, RGBW40		
Efficacy	42 - 43 lm/W	Dimming type	DMX, DMX/RDM		
Driver option	Remote driver (included)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Through wiring	Single cable entry
Driver	Constant voltage (CV)			Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
		Weight	0.9 kg	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NOD-50002

GLP
Good Labour Practices
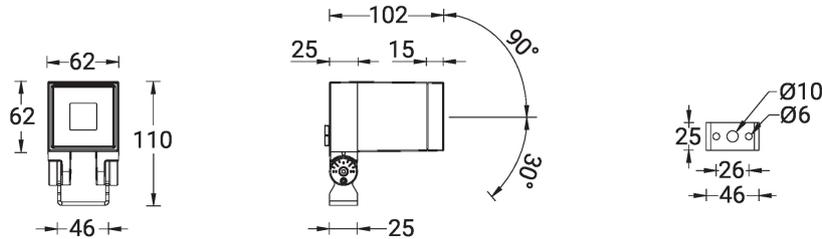
Accessory

Anti-glare visor **A52831**	Honeycomb louvre **A51821**	Linear spread lens **A51114**	Ground spike **A51141**

DMX Control System **Control-DMX**	DMX/RDM Control System **Control-DMX-RDM**

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

We reserve the right to make technical and design changes.

07:26, 26-02-2026

https://www.ligman.com/nordstrom-1-nod-50002/

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com