

NORDSTROM 2 (NOD-50012) (Version 1)



Product description

With remote driver IP-rated - Constant voltage (CV) 24 V - 82x82 mm - Class III - RGBW




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)

Optic

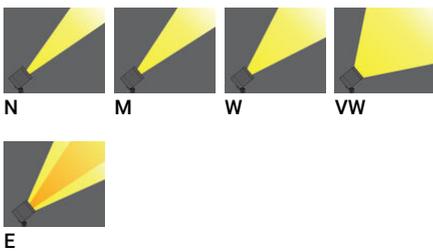

Product colour



Special finishes upon request




NORDSTROM 2 (NOD-50012) (Version 1)

Technical information

Material	Aluminium	Input voltage	24 VDC	Operating temperature	-20 °C to 40 °C
Light source	4 LED	Optic	N, M, W, VW, E	EPA (m2)	0.014
Power	13 W	Optic value	8°, 17°, 26°, 65°, 43°x11°	Cable	One cable gland supplied with 0.2 m of 5x1.0 sqmm outdoor cable
Lumen	406 - 520 lm	CCT / CRI	RGBW30, RGBW40	Through wiring	Single cable entry
Efficacy	41 - 52 lm/W	Dimming type	DMX, DMX/RDM	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Driver option	Remote driver (included)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant voltage (CV)			Weight	1.3 kg

NOD-50012

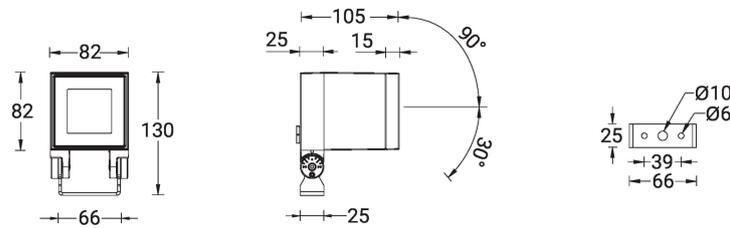

Accessory


DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Linear spread lens
A51214

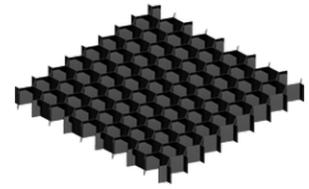

Honeycomb louvre
A51921



Anti-glare visor
A52931



Ground spike
A50641

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.