

SANDY 10 (SA-31562) (Version 2)



Product description

Large




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour



Special finishes upon request

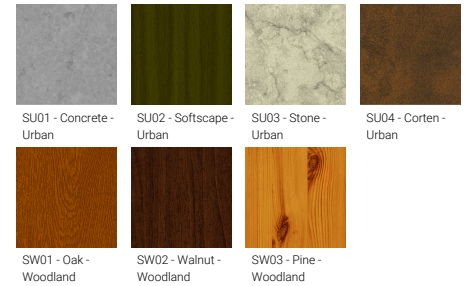


SANDY 10 (SA-31562) (Version 2)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--|---------------------------------|---|
| Material | Aluminium | Optic value | 110°x109° | Operating temperature | -20 °C to 40 °C |
| Light source | 96 LED | CCT / CRI | 3000K CRI80, 4000K CRI80 | Through wiring | Two cable entries for through wiring |
| Power | 27 W | Bug | B0-U3-G2 | Lens / Reflector / Optic | Opal UV-stabilised polycarbonate diffuser |
| Lumen | 1211 - 1274 lm | ULR | 35 | MacAdam Ellipse | 3 SDCM |
| Efficacy | 45 - 47 lm/W | ULOR | 35 | Lifetime L90B10 (hours) | > 37,000 |
| Driver option | Integral control gear | CIE flux code n°3 | 74 | Lifetime L80B10 (hours) | > 78,000 |
| Driver | Constant current (CC) | Dimming type | On/Off, 1-10V, DALI | Lifetime L80B50 (hours) | > 86,000 |
| Input voltage | 220-240 V 50/60 Hz | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | Variants (1-10V) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Optic | G | | | | |
| | | Weight | 4.1 kg | | |

SA-31562

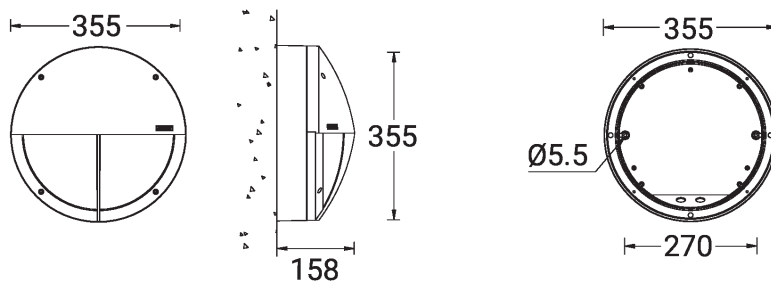

SANDY 10 (SA-31562) (Version 2)**Accessory**



Surface mounting box for easy
cabling (SANDY 10)
SCE-SANDY-10



DALI Control System
Control-DALI
