

BILLUND 1 (BIU-90044-LC)



Product description


Small - LIGHTCONNECT™




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear
- Surge protection 10kV
- Constant lumen output (CLO) and Night-time dimming options


Optic

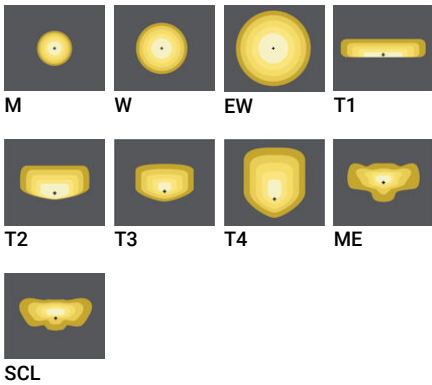

Product colour

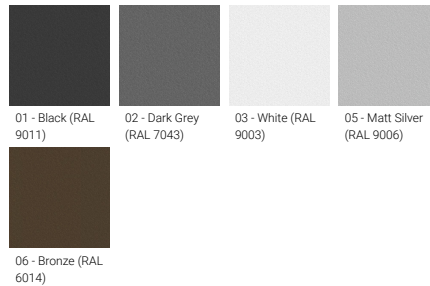

Special finishes upon request

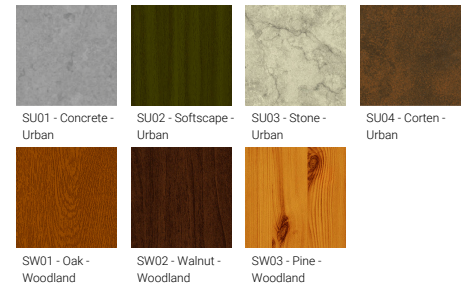


BILLUND 1 (BIU-90044-LC)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|---|---------------------------------|--|
| Material | Aluminium | Optic | M, W, EW, T1, T2, T3, T4, ME, SCL | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Light source | 24 LED | Optic value | 31°, 56°, 106°x113°, 149°x72°, 137°x51°, 126°x89°, 103°x74°, 138°x56°, 151°x65° | Weight | 6.1 kg |
| Power | 83 W | CCT / CRI | 2700K CRI70, 2700K CRI80, 3000K CRI70, 3000K CRI80, 4000K CRI70, 4000K CRI80 | Operating temperature | -20 °C to 40 °C |
| Lumen | 8304 - 11124 lm | Bug | B2-U0-G1, B2-U0-G2, B3-U0-G0, B3-U0-G3, B4-U0-G0, B4-U0-G1 | EPA (m2) | 0.040 |
| Efficacy | 100 - 134 lm/W | ULR | <1% | Cable | One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable |
| Driver option | Integral control gear | ULOR | <1% | Through wiring | Single cable entry |
| Driver | Constant current (CC) | CIE flux code n°3 | 96, 97, 98, 99 | Lens / Reflector / Optic | Clear toughened glass, High-efficiency polycarbonate lens |
| Input voltage | 220-240 V 50/60 Hz | Dimming type | DALI | Variants (DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

BIU-90044

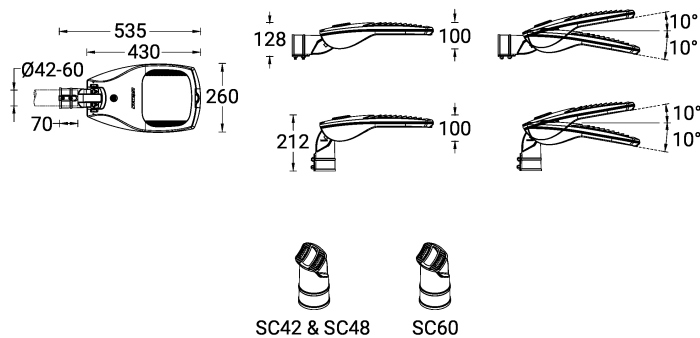

BILLUND 1 (BIU-90044-LC)**Accessory**

NEMA 7 socket
A90891



Zhaga Book 18 socket (Up)
A90991-U



Motion sensor - PIR - DALI - Up
to 3 m
A91691-L2



Motion sensor - PIR - DALI - Up
to 12 m
A91691-L7



Zhaga Book 18 socket (Down)
A90991-D



DALI Control System
Control-DALI