

LIGHTALK 11 (LA-60023) (Version 1)



Product description

Without remote driver - With recessing box - Constant voltage (CV) 24 V - 1250 mm - Class III



Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

Optic



VN N M W



E

Product colour




00 - Stainless Steel

LIGHTALK 11 (LA-60023) (Version 1)

Technical information

Material	Stainless Steel	Input voltage	24 VDC	Dimming type	On/Off
Light source	36 LED	Optic	VN, N, M, W, E	Product colours	Stainless Steel
Power	51 W	Optic value	13°, 15°, 25°, 42°, 21° x 36°	Weight	7.1 kg
Lumen	3871 - 4975 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Efficacy	76 - 98 lm/W	Bug	B2-U1-G0, B3-U1-G0	Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Driver option	Remote driver (not included)	ULR	100%	Through wiring	Two cable entries for through wiring
Driver	Constant voltage (CV)	ULOR	100%	Lens / Reflector / Optic	Clear toughened glass

LA-60023

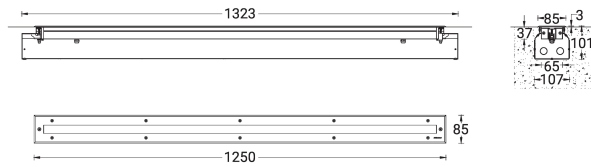


LIGHTALK 11 (LA-60023) (Version 1)

Accessory




Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001



Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001



Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND