

**NEVADA 2 (NE-60834)****Product description**

Without remote driver - With recessing box - Constant current (CC) 350 mA - RGBW

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 3 mm thick front ring in grade 316 stainless steel
- Single cable entry
- One cable gland supplied with 0.5 m of 5x0.75 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box in high-density polyethylene is included
- Suitable for walk-over with a maximum load of 200 kg
- To ensure efficient drainage, gravel must be used to a depth of 450 mm and width of 300 mm beneath the housing and should also be placed around luminaire

**Optic****M****Product colour**

00 - Stainless Steel

**NEVADA 2 (NE-60834)**


**Technical information**

<b>Material</b>	Stainless Steel
<b>Light source</b>	1 LED
<b>Power</b>	3.3 W
<b>Lumen</b>	224 lm
<b>Efficacy</b>	68 lm/W
<b>Driver option</b>	Remote driver (not included)
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	350 mA, 3 VDC
<b>Optic</b>	M
<b>Optic value</b>	33°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Bug</b>	B0-U3-G0
<b>ULR</b>	100%
<b>ULOR</b>	100%

<b>Dimming type</b>	DMX, DMX/RDM
<b>Product colours</b>	Stainless Steel
<b>Weight</b>	0.5 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 0.5 m of 5x0.75 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass

NE-60834

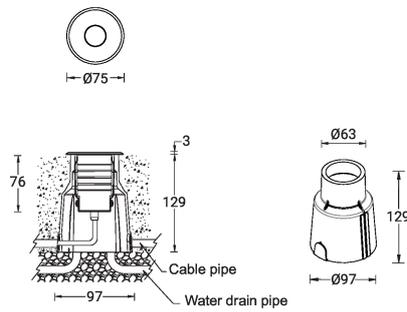

**NEVADA 2 (NE-60834)**

**Accessory**

---



---

Remote box IP65  
**A80191**

---



---

DMX Control System  
**Control-DMX**

---



---

DMX/RDM Control System  
**Control-DMX-RDM**

---