

**PRAGUE 2 (PRA-10012) (Version 2)**



**Product description**

200x80 mm - 1000 mm



microPrim™




**DARKSKY APPROVED**  
Reduces light pollution  
Certified by DarkSky.org


**Luminaire Structure**

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


**Optic**

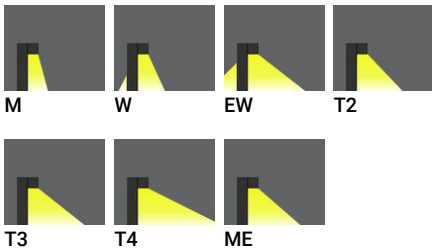

**Product colour**

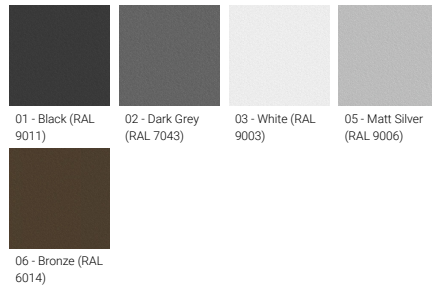

**Special finishes upon request**

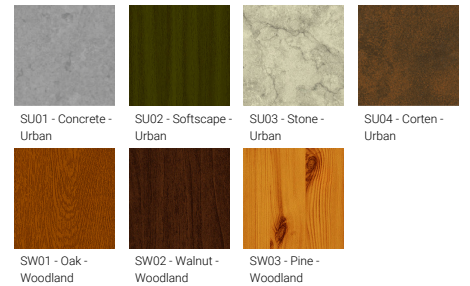

**PRAGUE 2 (PRA-10012) (Version 2)**


**Technical information**

|                      |                          |
|----------------------|--------------------------|
| <b>Material</b>      | Aluminium                |
| <b>Light source</b>  | 8 LED                    |
| <b>Power</b>         | 14 W                     |
| <b>Lumen</b>         | 1317 - 1594 lm           |
| <b>Efficacy</b>      | 94 - 114 lm/W            |
| <b>Driver option</b> | Integral control gear    |
| <b>Driver</b>        | Constant current (CC)    |
| <b>Input voltage</b> | 220-240 V 50/60 Hz       |
| <b>Optic</b>         | M, W, EW, T2, T3, T4, ME |

|                          |  |
|--------------------------|--|
| <b>Optic value</b>       | 30°x21°, 53°x31°, 114°x63°, 140°x31°, 143°x53°, 129°x45°, 144°x37°   |
| <b>CCT / CRI</b>         | 2700K CRI80, 3000K CRI80, 4000K CRI80  |
| <b>Bug</b>               | B0-U2-G0, B0-U2-G1, B0-U3-G1, B1-U3-G1   |
| <b>ULR</b>               | 1%, 2%, 3%, 7%, 8%, 9%   |
| <b>ULOR</b>              | 1%, 2%, 3%, 7%, 8%, 9%   |
| <b>CIE flux code n°3</b> | 95, 96, 97, 98   |
| <b>Dimming type</b>      | On/Off, 1-10V, DALI  |
| <b>Product colours</b>   | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>            | 8.7 kg   |

|                                       |   |
|---------------------------------------|---|
| <b>Operating temperature</b>          | -20 °C to 40 °C   |
| <b>Cable</b>                          | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable  |
| <b>Through wiring</b>                 | Single cable entry  |
| <b>Lens / Reflector / Optic</b>       | Clear toughened glass, High-efficiency PMMA lens  |
| <b>MacAdam Ellipse</b>                | 3 SDCM  |
| <b>Lifetime L90B10 (hours)</b>        | > 90,000  |
| <b>Lifetime L80B10 (hours)</b>        | > 90,000  |
| <b>Lifetime L80B50 (hours)</b>        | > 90,000  |
| <b>Variants (On/Off, 1-10V, DALI)</b> | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO) |

PRA-10012

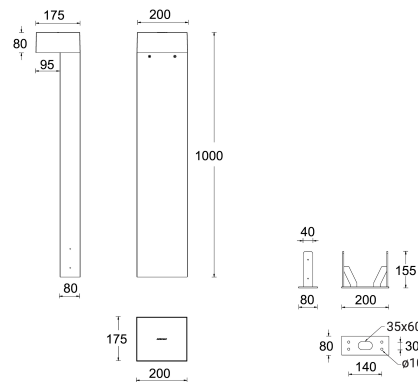

**Accessory**

---



DALI Control System  
**Control-DALI**

---



Anchor bolt  
**A11191**

---