


EURASIA 2 (EU-30226-3)



Product description

Pointed top without shade

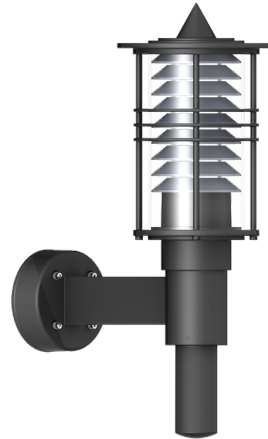

microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear

Optic




G

Product colour

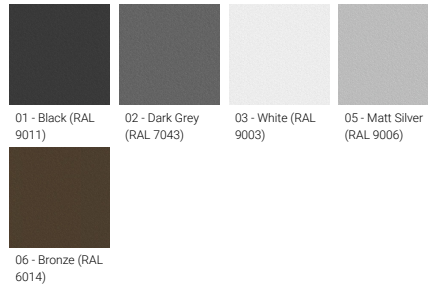

Special finishes upon request

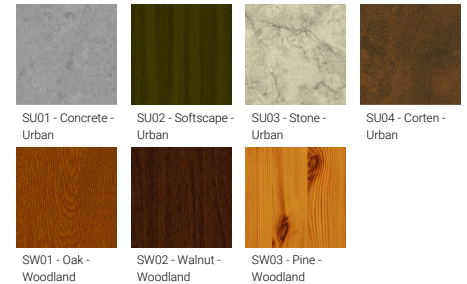

EURASIA 2 (EU-30226-3)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	176°		
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80		
Lumen	1040 - 1053 lm	Bug	B1-U3-G1		
Efficacy	25 - 26 lm/W	ULR	25%		
Driver option	Integral control gear	ULOR	25%	Weight	11.8 kg
Driver	Constant current (CC)	CIE flux code n°3	76	Operating temperature	-20 °C to 40 °C
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off	Through wiring	Two cable entries for through wiring
				Lens / Reflector / Optic	Clear UV-stabilised polycarbonate diffuser
				MacAdam Ellipse	3 SDCM
				Lifetime L90B10 (hours)	> 55,000

EU-30226-3

