


**GAVLE 5 (GAV-90151)**



**Product description**

Down (Optic) & Up (Optic 2nd) - 60x100 mm - 3000 mm

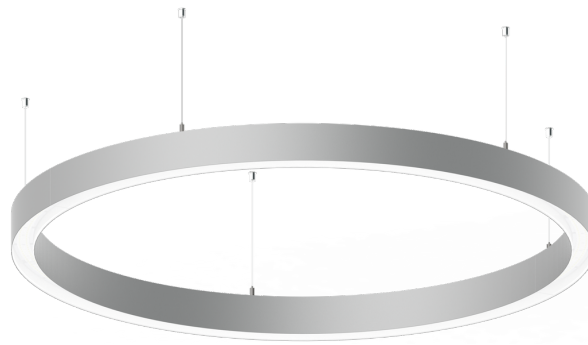

microPrim™

**Luminaire Structure**

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Opal PMMA diffuser (UGR <19) for glare control

- Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI)
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options

**Optic**




O/O

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**

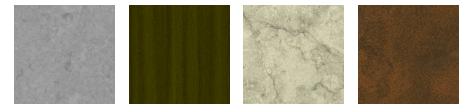

SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**GAVLE 5 (GAV-90151)**


**Technical information**

|                      |   |
|----------------------|---|
| <b>Material</b>      | Aluminium   |
| <b>Light source</b>  | 1152 & 1152 LED   |
| <b>Power</b>         | 294 W   |
| <b>Lumen</b>         | 29041 - 30314 lm  |
| <b>Efficacy</b>      | 99 - 103 lm/W   |
| <b>Driver option</b> | Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI) |

|                          |                       |
|--------------------------|-----------------------|
| <b>Driver</b>            | Constant current (CC) |
| <b>Input voltage</b>     | 220-240 V 50/60 Hz    |
| <b>Optic</b>             | O                     |
| <b>Optic value</b>       | Opal                  |
| <b>Optic (2nd)</b>       | O                     |
| <b>Optic (2nd) value</b> | Opal                  |

|                                       |   |
|---------------------------------------|---|
| <b>CCT / CRI</b>                      | 3000K CRI80, 4000K CRI80  |
| <b>Dimming type</b>                   | On/Off, 1-10V, DALI   |
| <b>Product colours</b>                | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>                         | 31.2 kg   |
| <b>Operating temperature</b>          | -20 °C to 40 °C   |
| <b>Variants (On/Off, 1-10V, DALI)</b> | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)                                   |

GAV-90151

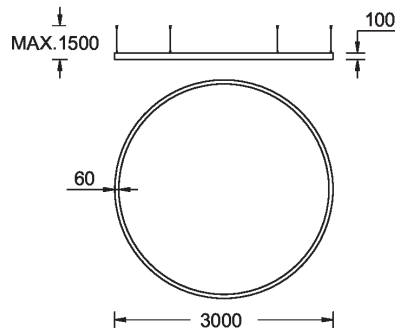

**GAVLE 5** (GAV-90151)**Accessory**

Supply cable surface mounting  
box  
**A80981**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**