

JET 42 (JE-80062)



Product description

160x160 mm - 140 mm - Square




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Optic

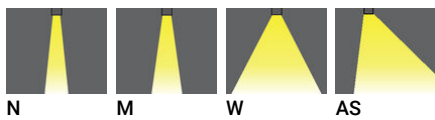

Product colour

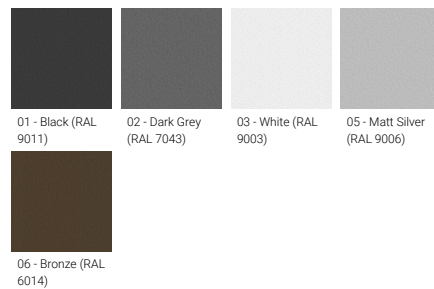

Special finishes upon request

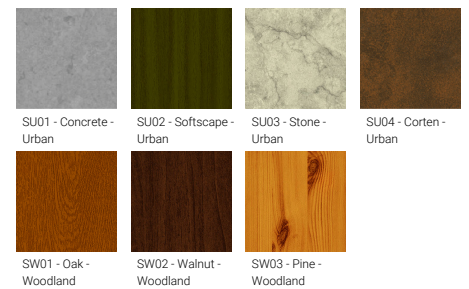

JET 42 (JE-80062)


Technical information

Material	Aluminium
Light source	1 COB
Power	20 W
Lumen	1632 - 2284 lm
Efficacy	82 - 114 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, AS

Optic value	22°, 35°, 52°, 46°x56°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B1-U1-G0, B2-U1-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.2 kg

Operating temperature	-20 °C to 50 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,700
Lifetime L80B10 (hours)	> 63,500
Lifetime L80B50 (hours)	> 63,500
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

JE-80062



JET 42 (JE-80062)**Accessory**



Surface mounting box for easy
cabling (JET 42)
SCE-JET-42



DALI Control System
Control-DALI
