

VANCOUVER 31 (VA-10101)



Product description

120x120 mm - 600 mm - No decorative pattern



microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector


- Clear toughened glass
- Integral control gear

Optic




G

Product colour

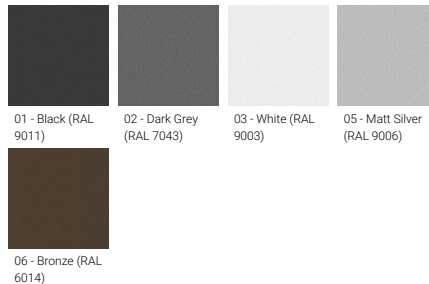

Special finishes upon request

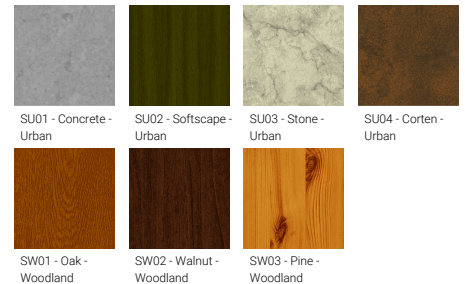

VANCOUVER 31 (VA-10101)


Technical information

Material	Aluminium
Light source	1 LED
Power	7 W
Lumen	192 - 200 lm
Efficacy	27 - 29 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	34°
CCT / CRI	3000K CRI80, 4000K CRI80
ULR	<1%
ULOR	<1%
CIE flux code n°3	99

Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	12.0 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass

VA-10101

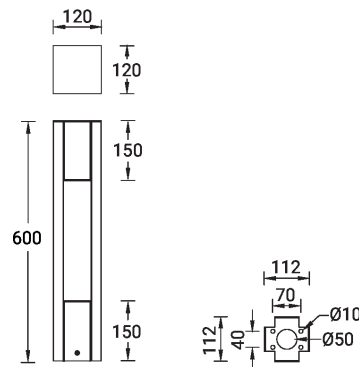

VANCOUVER 31 (VA-10101)**Accessory**



Anchor bolt
A12491
