

VEKTER 3 (VK-10001)



Product description


Ø102 - 1200 mm - 1 side



Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens

Optic

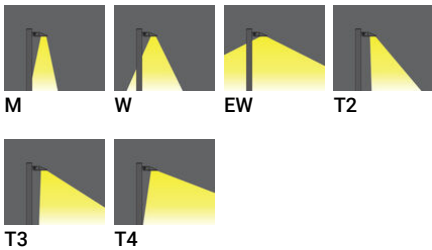

Product colour



Special finishes upon request



VEKTER 3 (VK-10001)


Technical information

Material	Aluminium
Light source	12 LED
Power	20 W
Lumen	2353 - 2728 lm
Efficacy	124 - 144 lm/W
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T2, T3, T4, ME
Optic value	29°, 40°x54°, 106°x114°, 56°x140°, 92°x127°, 72°x103°, 62°x139°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80

Bug	B1-U1-G0, B1-U1-G1, B1-U2-G0, B1-U2-G1, B2-U2-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	96, 97, 99
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	7.5 kg
Operating temperature	-20 °C to 50 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

VK-10001

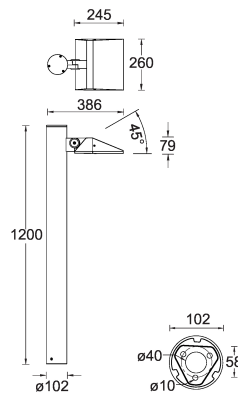

VEKTER 3 (VK-10001)

Accessory



Anchor bolt
A10791



DALI Control System
Control-DALI