

**GANDALF 25 (GA-90253)**



**Product description**

2 sides



microVos microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens

- Integral control gear
- Surge protection 10kV


**Optic**

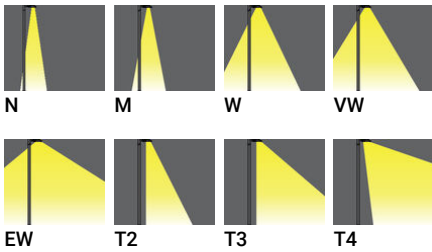

**Product colour**



**Special finishes upon request**

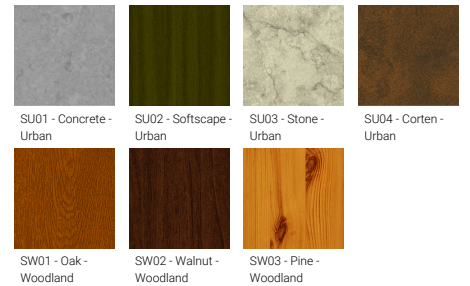


**GANDALF 25 (GA-90253)**

**Technical information**

<b>Material</b>	Aluminium	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Cable</b>	One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable
<b>Light source</b>	2 x 48 LED		B1-U0-G1, B2-U0-G0, B2-U0-G2, B3-U0-G0, B3-U0-G1, B4-U0-G0	<b>Through wiring</b>	Single cable entry
<b>Power</b>	108 W	<b>Bug</b>	<1%	<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency polycarbonate lens
<b>Lumen</b>	11094 - 14054 lm	<b>ULR</b>	<1%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Efficacy</b>	103 - 130 lm/W	<b>ULOR</b>	<1%	<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Driver option</b>	Integral control gear	<b>CIE flux code n°3</b>	100, 97, 98, 99	<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Input voltage</b>	220-240 V 50/60 Hz		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Optic</b>	N, M, W, VW, EW, T2, T3, T4, ME	<b>Product colours</b>			
<b>Optic value</b>	11°, 30°, 52°, 68°, 115°, 142°x42°, 150°x71°, 122°x79°, 148°x63°	<b>Weight</b>	17.5 kg		
		<b>Operating temperature</b>	-20 °C to 50 °C		
		<b>EPA (m2)</b>	0.153		

GA-90253

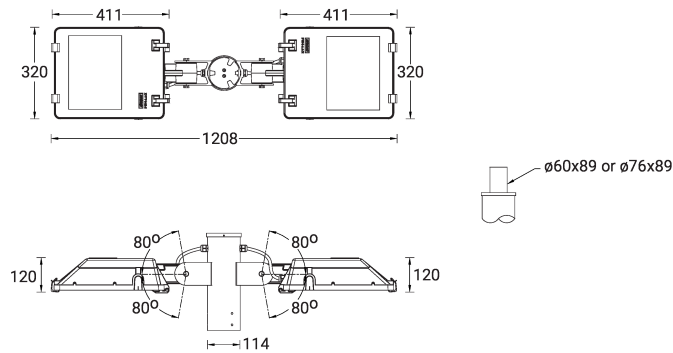

**GANDALF 25** (GA-90253)

**Accessory**

---



DALI Control System  
**Control-DALI**

---