

LIGHTALK 13 (LA-95031) (Version 1)



Product description

Without remote driver - Constant voltage (CV) 24 V - 410 mm - Class III




microPrim™

Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable

Optic

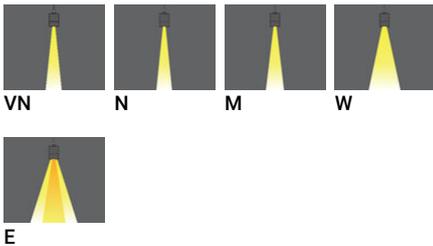

Product colour



Special finishes upon request



LIGHTALK 13 (LA-95031) (Version 1)


Technical information

| | |
|----------------------|------------------------------|
| Material | Aluminium |
| Light source | 12 LED |
| Power | 16 W |
| Lumen | 1471 - 1882 lm |
| Efficacy | 92 - 118 lm/W |
| Driver option | Remote driver (not included) |
| Driver | Constant voltage (CV) |
| Input voltage | 24 VDC |

| | |
|--------------------------|-------------------------------|
| Optic | VN, N, M, W, E |
| Optic value | 13°, 15°, 27°, 43°, 21° x 35° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B2-U1-G0, B3-U1-G0 |
| ULR | <1% |
| ULOR | <1% |
| CIE flux code n°3 | 100 |
| Dimming type | On/Off |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 1.3 kg |
| Operating temperature | -20 °C to 40 °C |
| EPA (m2) | 0.032 |
| Cable | Two IP67 connectors supplied with 2x0.3 m of 2x1.0 sqmm outdoor cable |
| Through wiring | Two cable entries for through wiring |
| Lens / Reflector / Optic | Clear toughened glass |

LA-95031




LIGHTALK 13 (LA-95031) (Version 1)

Accessory




Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001

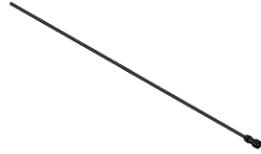

Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001



Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND